



2017

COOLING MOTOR CATALOGUE

OVER 400
REPLACEMENT
MOTORS FOR
OVER 50 OEM'S



Direct Heatcraft OEM Replacement Motor

Features

- Advanced ECM Design
- Single Speed
- Ball Bearing
- 42 Frame
- Class B Insulation
- Lyall Plug
- Energy efficient
- 4 Studs each end



Part #	Volts	HP	Speeds/ RPM	Rotation	Amps	Body	Shaft	Cross
M4-R2155	120	1/15,1/20,1/25	1/1625	CCW	1.2	2.85	3.0"×5/16"	22617801, 22618001, 25307801, 25308001
M4-R2156	120	1/15,1/20,1/25	1/1625	CW	1.2	2.85	3.0"×5/16"	2531194
M4-R2157	230	1/15,1/20,1/25	1/1625	CCW	0.7	2.85	3.0"×5/16"	22617701, 22617901, 25307701, 25307901
M4-R2158	230	1/15,1/20,1/25	1/1625	CW	0.7	2.85	3.0"×5/16"	2531195

58mm ECM Fan Packs

The Unitronix line of motors is the latest in high efficiency unit bearing motors. The design incorporates permanent magnet, electronically commutated technology with the time proven ruggedness of the cast iron, unit bearing design. Dimensionally interchangeable with comparable output Shaded Pole and PSC unit bearing fan motors.

Features

- Exceeds 60% efficiency across a wide operating range in actual fan motor applications.
- Delivers constant speed regardless of line voltage fluctuation within the normal operating range.
- Cast iron bearing and thick film lubrication system for long life and dependability.
- Cool running, very low motor heat rise maximizes system efficiency.
- Lyall plug
- Evaporator fan duty
- Electro coated metal shroud with aluminum fan blade

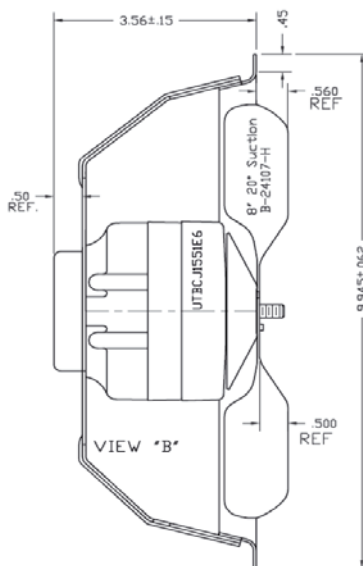
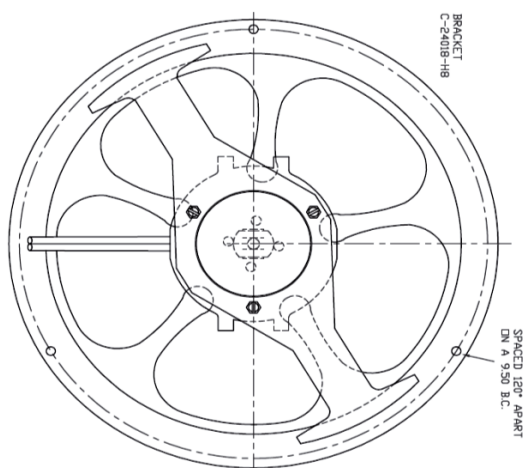


Figure A

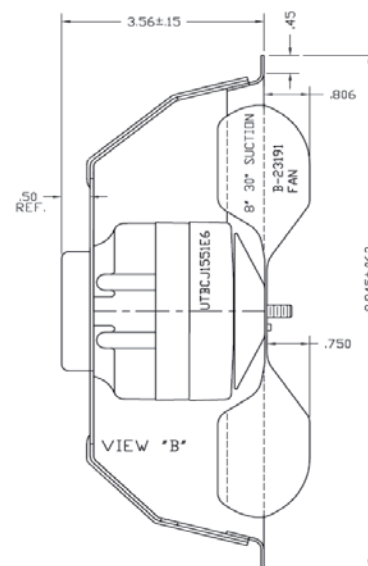


Figure B

Part #	Volts	Speeds/ RPM	Rotation	Amps	CFM @ .05"	CFM @ .10"	CFM @ .15"	Cross	Figure
04-R5470	115	1/1550	CW	0.30	345	285	215	05470, 5SME58AAF1027	A
04-R5472	115	1/1550	CW	0.30	385	315	225	05471, 5SME58AAF1026, 05472, 5SME58AAF1031	B
	115	1/1550	CW	0.30	405	375	265		

The **Comfort Select~FC** motor is a brushless DC high efficiency motor that runs off of a 120 volt single phase input. The motor is controlled by integrated electronics providing advanced motor protection with the same performance characteristics as a shaded pole or PSC motor. The **Comfort Select~FC** is designed as a direct replacement or retrofit product for shaded pole and PSC motors and may be used in fan coil and PTAC* applications as an energy saving retrofit.

Benefits

- ECM with internal control
- Long life ball bearings
- Rotors are isolated from shaft to reduce motor vibration
- Saves an average of 69% on energy usage
- Runs cooler
- Easy to install



Features

- Drop-in replacement
- Single Phase
- Brushless DC
- 3 Speeds
- 5 1/8" diameter
- 54" lead length
- Energy efficient



Fan Coils • Air Conditioners • Blowers • Shaded Pole or PSC Retrofit
Trane • Carrier • Amana • GE • Fan Coil & PTAC Units

Part #	Volts	HP	Speeds	Rotation	Amps	RPM Range	Shaft	Frame
M4-R2189	120	1/10	3	CWLE	1.56	1100,900,700	9.3" x 1/2" x 9.3"	42

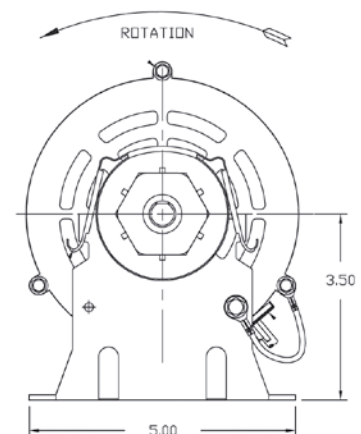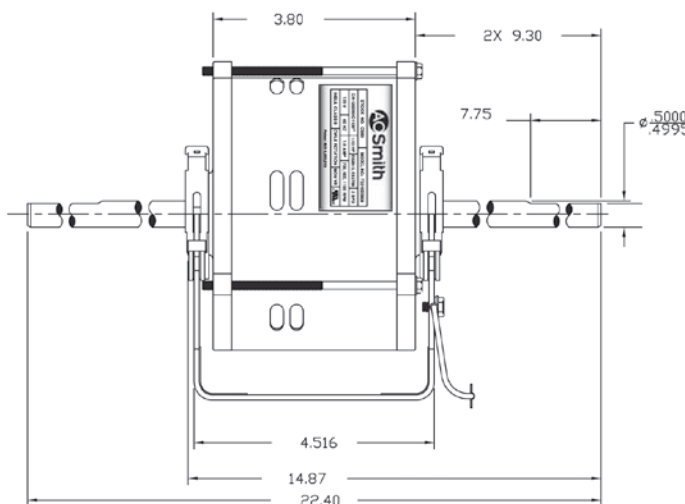

ECM Unit Bearing Motors

Features

- Constant speed program works to maintain speed even in restricted airflow situations
- 15" Leads with Lyall plug
- Cast iron
- Vertical up or horizontal
- Suitable for use in evaporator and condenser applications
- Oil Rated -20°F to 120°F
- 5 drilled and tapped mounting holes allows for standard 3-hole and Hussmann 4-hole mounting.
- Leg Mount features four drilled & tapped mounting holes on each side

**Replaces 6, 9, 12, 13,
14, 15 & 16 Watt P.S.C.
and Shaded Pole Motors**



- Traditional 3 Point Mount = Red & White
- New Hussmann 4 Point Mount = Green & Red
- O4-R6711 replaces: Hussmann SVC #110.441.0546

Part #	Volts	Watts	Amps	RPM	Rotation	A Dim.
O4-R6711	115	6,9,12	.20/.30	1550	CW	2.53"
O4-R6712	230	6,9,16	.20/.30	1550	CW	2.53"
O4-R6811	115	14,15,16	.47/.58	1550	CW	2.53"

ECM Unit Bearing Walk-in Cooler Replacement Motor

- Replacement for SSC 50 Watt motors on HTPG, HTP, Russel Coil, and Witt units
- Cross Reference
 - 115 Volt: 08216124 (R8124)
 - 230 Volt: 08216125 (R8125)



Part #	Volts	Watts	Amps	RPM	Rotation	A Dim.
O4-R8124	115	50	1.25	1550	CCW	2.78"
O4-R8125	230	50	0.60	1550	CCW	2.78"

ECM Unit Bearing Replacement For 3.3" Diameter Motors

Heatcraft Replacement Motors - Bohn, Chandler, Climate Control and Larkin

- Walk-In cooler applications
- Low Temperature oil
- Bracket may be reversed for rear bolt (shaft down) applications
- Operating temperature:
-20°F(-29°C) to 104°F(40°C)
- 16" Leads with Lyall plug
- Cast iron
- Shaft down & horizontal mounting
- Suitable for use in evaporator or condenser applications




Part #	HP	Amps	Volts	Rotation	RPM	Shaft	A Dim.	Cross
04-R6350	1/15	1.25	115	CCW	1550	1.95" × 5/16"	3.2"	9209L, 05105, 5SME59BVA1038
04-R6355	1/15	1.25	115	CW	1550	1.95" × 5/16"	3.2"	9210L, 05104, 5SME59BVA1036
04-R6360	1/15	0.77	230	CCW	1550	1.95" × 5/16"	3.2"	9209H, 05205, 5SME59BVA2039
04-R6365	1/15	0.77	230	CW	1550	1.95" × 5/16"	3.2"	9210H, 05204, 5SME59BVA2037
04-R6370	1/10	1.35	115	CCW	1550	2.60" × 5/16"	4.4"	
04-R6375	1/10	1.35	115	CW	1550	2.60" × 5/16"	4.4"	
04-R6380	1/10	0.50	230	CCW	1550	2.60" × 5/16"	4.4"	
04-R6385	1/10	0.50	230	CW	1550	2.60" × 5/16"	4.4"	

ECM Unit Bearing Replacement For GE 44 Frame Motors

- Used on Hussmann, Tyler, & Hill Phoenix supermarket cases
- Operating temperature:
Evaporator fan duty only
-20°F(-29°C) to 40°F(4°C)
- 16" Leads with Lyall plug
- Cast iron
- Shaft vertical up & horizontal mounting



Featuring an extended hub to ensure proper fan blade location

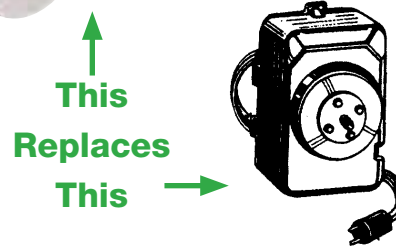

Part #	Watts	Amps	Volts	Rotation	RPM	Shaft	A Dim.
04-R5443	9	0.45	115	CW	1650	1/4" × 20	2.78"
04-R5444	16	0.55	115	CW	1850	1/4" × 20	2.78"

Reduce your carbon foot print and electricity bill at the same time. Become more environmentally friendly! The ECM series allows efficiency rates up to 70%, 4-5 times more efficient than a traditional shaded pole fan motor. Higher efficiency means cooler motor operation, longer bearing expected life and reduced heat delivered to the refrigeration cycle, for a combined energy saving advantage and improved refrigeration quality.

The ECM-IP Series is widely used in industrial and commercial refrigeration for condensing and evaporating units, food and beverage coolers, freezers, supermarket display cases, walk-ins and reach-ins.

Features

Increased life:

Life expectancy of 60,000+ hrs. with our sealed ball bearing option.

Moisture protection:

The ECM series offers IP65 & IP66 moisture protection grade, one of the highest in the industry.

Wide range of CFM:

Choose among three different factory preset RPM options and a wide range of fan blades from 6 to 10 inches diameter and various pitches, to satisfy all CFM needs.

Multiple mounting:

Compatible with ELCO's standard accessories, giving higher flexibility in motor mounting. Installation on a shroud, a grid or a mounting bracket.

Drop in replacement:

The ECM-IP Series motor is a direct drop-in replacement to our shaded pole motor (NU series) for an easy and hassle free "green turn".

Modular Design

Designed to mount ELCO standard (and third party) or integrated design fan blades, for extreme application flexibility and to cover a wide range of performance requirements.

Compact design:

The ECM compact design with its integrated plastic fan blade is ideal for reduced space depth applications.



Stock #	Watt	Volt	RPM	Amp	ELCO OEM #	Type	A dim.	Cord length	Term. / Plug.
EC-HE0147	12	115	1450	0.18	EDA12153UC0147	A	3.61"	14"	3pin 90°
EC-HE0170	12	115	1450	0.18	EDA12153UN0170	B	3.62"	14"	3pin 90°
EC-HE0176	15	115	1600	0.22	EDA15253UC0176	A	4.00"	16"	2pin 90°
EC-HE0182	10	115	1550	0.19	EDA10153UC0182	A	3.61"	16"	2pin 90°

Cross Reference

Part #	OEM Name	OEM #
EC-HE0147	Arneg Canada & US	34410013 , 34410009, 24681010
EC-HE0170	Arneg Canada & US	34410012 (for fan 34415010)
EC-HE0176	Hill Phoenix	P078449H
EC-HE0182	Hill Phoenix	P079441C, P066237A

Dual Voltage 370/440V • Single MFD

370/440 Volt Oval							MFD	370/440 Volt Round					
Dimensions (Millimeters)			Dimensions (Inches)			OVAL		ROUND	Dimensions (Inches)		Dimensions (Millim- eters)		
Width	Depth	Height	Width	Depth	Height				Dia.	Height	Dia.	Height	
51.5	31.5	60	2.03	1.24	2.36	36-5-370440	5	36-5R3744	1.65	2.37	42	60	
51.5	31.5	60	2.03	1.24	2.36	36-7-370440	7.5	36-7R3744	1.65	2.37	42	60	
51.5	31.5	80	2.03	1.24	3.15	36-10-370440	10	36-10R3744	1.65	2.78	42	70	
51.5	31.5	80	2.03	1.24	3.15	36-12-370440	12.5	36-12R3744	1.65	2.78	42	70	
51.5	31.5	80	2.03	1.24	3.15	36-15-370440	15	36-15R3744	1.65	3.15	42	80	
71.0	45.0	80	2.80	1.77	3.15	36-17-370440	17.5	36-17R3744	1.65	3.15	42	80	
71.0	45.0	80	2.80	1.77	3.15	36-20-370440	20	36-20R3744	1.78	3.15	45	80	
71.0	45.0	80	2.80	1.77	3.15	36-25-370440	25	36-25R3744	1.78	3.54	45	90	
71.0	45.0	90	2.80	1.77	3.55	36-30-370440	30	36-30R3744	2.00	3.94	50	100	
71.0	45.0	90	2.80	1.77	3.55	36-35-370440	35	36-35R3744	2.00	3.94	50	100	
71.0	45.0	90	2.80	1.77	3.55	36-40-370440	40	36-40R3744	2.00	4.33	50	110	
71.0	45.0	110	2.80	1.77	4.33	36-45-370440	45	36-45R3744	2.00	4.33	50	110	
71.0	45.0	110	2.80	1.77	4.33	36-50-370440	50	36-50R3744	2.00	4.33	50	110	

ROUND

Dual Voltage 370/440V • Dual MFD

370/440 Volt Oval						MFD	370/440 Volt Round					
Dimensions (Millimeters)			Dimensions (Inches)				OVAL	ROUND	Dimensions (Inches)		Dimensions (Millim- eters)	
Width	Depth	Height	Width	Depth	Height				Dia.	Height	Dia.	Height
71.0	45.0	80	2.80	1.77	3.15	36-25-5-3744	25/5	36-255R3744	1.97	3.54	50	90
71.0	45.0	100	2.80	1.77	3.94	36-30-5-3744	30/5	36-305R3744	1.97	4.16	50	105
71.0	45.0	100	2.80	1.77	3.94	36-35-5-3744	35/5	36-355R3744	2.17	4.33	55	110
71.0	45.0	110	2.80	1.77	4.33	36-40-5-3744	40/5	36-405R3744	2.36	4.72	60	120
71.0	45.0	110	2.80	1.77	4.33	36-45-5-3744	45/5	36-455R3744	2.36	4.72	60	120

SQUARE

Higher Voltage Capacitors Can Be Substituted For Lower Voltage Applications.

Dual Voltage 250-440V • Single MFD

250-440 Volt Square							MFD
Dimensions (Millimeters)			Dimensions (Inches)			SQUARE	
Width	Depth	Height	Width	Depth	Height		
37.0	18.0	28.0	1.46	0.71	1.10	36-2S440	2
37.0	18.0	28.0	1.46	0.71	1.10	36-3S440	3
37.0	22.0	34.0	1.46	0.87	1.34	36-4S440	4
37.0	22.0	34.0	1.46	0.87	1.34	36-5S440	5
47.0	26.0	38.0	1.85	1.02	1.50	36-7.5S440	7.5
47.0	26.0	38.0	1.85	1.02	1.50	36-8S440	8
58.0	30.0	44.0	2.28	1.18	1.73	36-10S440	10
58.0	30.0	44.0	2.28	1.18	1.73	36-12.5S440	12.5
58.0	30.0	44.0	2.28	1.18	1.73	36-15S440	15
58.0	39.0	50.0	2.28	1.54	1.97	36-20S440	20

ROToM RUN CAPACITORS

- Heavy Duty, Compact Design
- UL & cUL Recognized
- Competitively Priced
- Built In Interrupter
- Largest Selection

NOTE:

CAPACITORS IN SERIES

- MFD rating decreases; Voltage increases.
- $$\text{New MFD Rating} = \frac{\text{MFD}_1 \times \text{MFD}_2}{\text{MFD}_1 + \text{MFD}_2}$$

CAPACITORS IN PARALLEL

- MFD increases; Voltage rating stays constant.
- (ex. two 5 MFD 370 V capacitors wired in parallel is the equivalent of a 10 MFD 370 V Capacitor)
- $$\text{New MFD Rating} = \text{MFD}_1 + \text{MFD}_2$$
- When connected in either series or parallel it is recommended that capacitors with the same MFD ratings be used.
 - Higher voltages may be substituted for lower voltages in the same MFD rating.



3.3" Refrigeration Motors

3.3" Hubless Motors - Totally Enclosed



115 & 230 Volts - Sleeve and Ball Bearing - Shaded Pole

Part #	Amps	HP	Spd/RPM	Voltage	Rotation	Body	Feature	Comment
O4-R1211	0.30	1/150	1/1550	115	CW	2.09	0.67" TO HUB FACE	5 WATT, DOMESTIC REF.
R1-R128	0.35	1/135	1/1550	115	CW	2.09	3 PT. MTG., 3 PIN PLUG	COLDSTREAM
R1-R122	0.35	1/60	1/1550	230	CW	2.50	3 PIN PLUG	FOSTER, COLDSTREAM
R1-R114	0.45	1/125	1/1550	115	CW	2.09	LEADS, 3 POINT OR LEG MOUNTING	GENERAL REPLACEMENT
R1-R123	0.50	1/70	1/1550	115	CW	2.60	TWO U BRACKETS	UNIVERSAL COOLER
R1-R108	0.60	1/100	1/1550	115	CCW	2.00	ONE U BRACKET, LEADS	BLANCHARD
R1-R120	0.55	1/85	1/1550	115	CW	2.24	LEADS, 3 POINT OR LEG MOUNTING	FOSTER
R1-R137	0.59	1/70	1/1550	115	CW	2.20	2 PIN PLUG	COLDSTREAM
R1-R129	0.65	1/60	1/3000	115	CCW	2.50	2 PIN PLUG	HILL REFRIGERATION
R1-R127	0.75	1/80	1/1600	115	CCW	2.09	STUD MOUNTING	FOSTER
R1-R125	0.80	1/20	1/1500	230	CCW	4.00	2 PIN PLUG, BALL BEARING	DUNHAM, BUSH
R1-R101	0.90	1/45	1/1550	115	CW	2.30	2 PIN PLUG, LEG MTG.	HUSSMANN
R1-R101L	0.90	1/45	1/1550	115	CW	2.30	2 PIN PLUG	HUSSMANN
R1-R103	0.90	1/45	1/1550	115	CCW	2.30	2 PIN PLUG	HUSSMANN
R1-R103L	0.90	1/45	1/1550	115	CCW	2.30	2 PIN PLUG, LEG MTG.	HUSSMANN
R1-R124	1.55	1/20	1/1550	115	CCW	4.00	2 PIN PLUG, BALL BEARING	DUNHAM BUSH

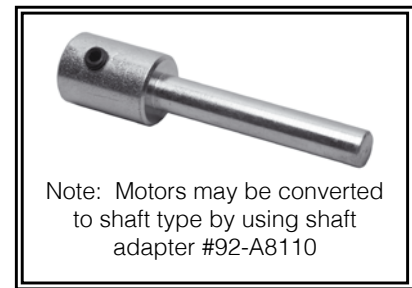


Part #	Watts	Amps	Volts	Rot	RPM	A Dim	Shaft	Comment
04-R5090	2	0.25	115	CW	1550	2.70"	Hubless	CAST IRON 2 WATT CONDENSER MOTOR
04-R5109		0.25	115	CW	1550	2.50"	Hubless	GE 5109, WR60X77, 5KSM51AG3070, 5KS-P51AZL826
04-R5211	4	0.35	115	CW	1550	2.58"	Hubless	TECUMSEH TFM41, G.E. 5211 5KSP51AL511
04-R5212		0.35	115	CCW	1550	2.58"	Hubless	G.E. 5212, 5KSP51AL513
04-R5221		0.20	230	CW	1550	2.58"	Hubless	G.E. 5221, 5KSP51AL512, COPELAND 050-0246-00
04-R5222		0.20	230	CW	1550	2.58"	Hubless	G.E. 5222, 5KSP51AL514
04-R5911	5	0.35	115	CW	1550	2.58"	Hubless	COPELAND 050-0010-00,0178-00 050-0246-01,HILL PP7577
04-R6247	6	0.35	115	CW	1550	3.44"	Hubless	R CORNELIUS
04-R5311		0.50	115	CW	1550	2.83"	Hubless	G.E. 5311, 5KSP51CL501, TECUMSEH TFM61, C
04-R5312		0.50	115	CCW	1550	2.83"	Hubless	5914767, 5914782, G.E. 5312, 5KSP51CL502
04-R5411	9	0.58	115	CW	1550	2.80"	Hubless	G.E. 5411, 5KSP51ECL551 TECUMSEH TFM91
04-R5401		0.60	115	CW	1550	2.80"	Hubless	True 800401, All angle evaporator motor
04-R5412		0.60	115	CCW	1550	3.40"	Hubless	G.E. 5412, 5KSP51ECL553
04-R5421		0.30	230	CW	1550	2.83"	Hubless	TECUMSEH TFM62, TFM92, G.E. 5421, 5KSP51ECL552
04-R5422		0.30	230	CCW	1550	2.83"	Hubless	G.E. 5422, 5KSP51ECL554
04-R5611		0.60	115	CW	1550	3.07"	Hubless	HUSSMANN 47000, 58698
04-R5612		0.60	115	CCW	1550	3.07"	Hubless	HUSSMANN 38360
04-R6273		0.60	115	CW	1550	3.13"	Hubless	CONDENSER MOTOR FOR CAN TYPE VENDING MACHINES

51 Frame Unit Bearing Motors



3.5" Diameter - 51 Frame - Totally Enclosed

Morrill / EMS Replacements



Note: Motors may be converted to shaft type by using shaft adapter #92-A8110

Part #	Watts	Amps	Volts	Rot	RPM	A Dim	Shaft	Comment
04-R5811	16	1.00	115	CW	1550	3.03"	Hubless	050-0164-00, 050-0247-00, 401-0032-01, G.E. 5811
04-R5812		1.00	115	CCW	1550	3.03"	Hubless	G.E. 5812, 5KSP51GL583T
04-R5821		0.50	230	CW	1550	3.03"	Hubless	G.E. 5821, 5KSP51GL582T
04-R5822		0.50	230	CCW	1550	3.03"	Hubless	G.E. 5822, 5KSP51GL584
04-R2011	23	0.80	115	CW	1500	3.75"	Hubless	HILL PP20934F
04-R2511	25	1.10	115	CW	1500	3.50"	Hubless	TECUMSEH TFM191, 810E019A73, 810E019A80
04-R2512		0.60	230	CW	1550	3.50"	Hubless	G.E. 0253
04-R2521		1.10	115	CCW	1500	3.50"	Hubless	ESPL25EMR1, ESPL25EVRD1
04-R2522		0.60	230	CCW	1500	3.50"	Hubless	ESPL25EMR2, ESPL25EVR2




Part #	Watts	Amps	Volts	Rot	RPM	A Dim	Shaft	Comment
O4-R3511	35	1.40	115	CW	1500	3.50"	Hubless	TECUMSEH TFM351, HUSSMANN 328346, COPELAND 050-0227-01
O4-R3512		0.70	230	CW	1500	3.50"	Hubless	TECUMSEH TFM 352, 810M35A12, 810M35A21, 810M35A28, COPELAND
O4-R3521		1.40	115	CCW	1500	3.50"	Hubless	G.E. 0352
O4-R3522		0.70	230	CCW	1500	3.50"	Hubless	ESPL35EM2B2C2, ESPL35EMR2
O4-R3531		1.40	115	CW	1500	3.60"	Hubless	Copeland 050-0367-03, 050-0367-06, 050-0367-10 EMS ESP-L35EM12H
O4-R3532		0.70	208/230	CW	1500	3.60"	Hubless	Copeland 050-0367-01, 050-0367-08, 050-0367-11, EMS ESP-L35EM24H
O4-R3612		0.70	230	CW	1500	3.50"	1.4"x5/16"	TECUMSEH TFM262, TFM362, 810A108, 810E026A81
O4-R5011	50	1.70	115	CW	1500	4.50"	1.5"x3/8"	COPELAND 050-0011-01,0017-02 050-0237-01, 998100800
O4-R5012		0.85	230	CW	1500	4.50"	1.5"x3/8"	COPELAND 050-0017-01,03,0011-00, 0101-00,0237-00,998100700
O4-R5021		1.70	115	CCW	1500	4.50"	1.5"x3/8"	A0502, 259, ESPL05EMR1
O4-R5022		0.85	230	CCW	1500	4.50"	1.5"x3/8"	TECUMSEH 810A31B, 810G037A20
O4-R5031		1.70	115	CW	1500	4.50"	Hubless	Copeland 050-03440-01, EMS ESP-OL50EM16H
O4-R5032		0.85	208/230	CW	1500	4.50"	Hubless	Copeland 050-03440-00, 050-03440-10 EMS ESP-OL50EM26H
O4-R5112		0.85	230	CW	1500	4.50"	1.4"x5/16"	TECUMSEH, 810M50A62
O4-R5122		0.85	230	CCW	1500	4.00"	2.0"x5/16"	TECUMSEH TFM502, 810G050A50, 050-0264-0
O4-R5460		0.44	460	CW	1500	4.50"	Hubless	Copeland 050-03440-03, EMS ESP-OL50EM46H

51 Frame Refrigeration Motors

3.5" Diameter - 51 Frame - Totally Enclosed

GE Replacements - Shaded Pole

- Unit Bearing
- CW Rotation
- 51 Frame
- Hubless Shaft
- Shaded Pole



ROToM
PLUS+



Part #	Watts	Volts	Amps	Spd/RPM	Type	Fig.	"A"	Shaft	Termination
EE-5211	4	115	0.29	1/1550	SP	1	2.74"	1/4" x 20 Hubless	
EE-5311	6	115	0.40	1/1550	SP	1	2.74"	1/4" x 20 Hubless	
EE-5610		115	0.40	1/1550	SP	4	2.74"	1/4" x 20 Hubless	
EE-5411	9	115	0.52	1/1550	SP	1	2.74"	1/4" x 20 Hubless	
EE-5611		115	0.52	1/1550	SP	2	2.74"	1/4" x 20 Hubless	
EE-5421		230	0.27	1/1550	SP	1	2.74"	1/4" x 20 Hubless	
EE-5811	16	115	0.90	1/1550	SP	1	2.97"	1/4" x 20 Hubless	
EE-5821		208/230	0.50	1/1550	SP	1	2.97"	1/4" x 20 Hubless	
EE-2511	25	115	1.10	1/1500	SP	1	3.15"	1/4" x 20 Hubless	
EE-2512		208/230	0.55	1/1500	SP	1	3.15"	1/4" x 20 Hubless	
EE-3511	35	115	1.40	1/1500	SP	1	3.15"	1/4" x 20 Hubless	
EE-3512		208/230	0.70	1/1500	SP	1	3.15"	1/4" x 20 Hubless	
EE-5011	50	115	1.70	1/1500	SP	3	3.52"	3/8" x 1.5"	
EE-5012		208/230	0.85	1/1500	SP	3	3.52"	3/8" x 1.5"	
EE-5112		208/230	0.85	1/1500	SP	3	3.52"	5/16" x 1.5"	

Fig. 1




Fig. 2




Fig. 3






Fig. 4






Leads




04-R5711
HUSSMANN / HILL / KYSOR

04-R5715, 04-R5716
TYLER / KYSOR




04-R5720
REVERSIBLE MODEL
FOR ALL MANUFACTURERS



EE-8419, EE-8416
STRIPPED LEADS

04-R5730
TRUE
Wiring
Harness
For Pepsi

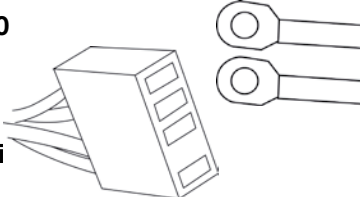

Part #	Watts	Volts	Amps	RPM	Rot	Type	Body	Shaft
04-R5730	9	115	0.26	1600	Rev	PSC	3.87"	1/4-20 Threaded
04-R5711	12	115	0.37	1550	CW	PSC	3.13"	1/4-20 Threaded
04-R5715	12	115	0.37	1550	CW	PSC	3.13"	1/4-20 Threaded
04-R5720	12	115	0.37	1550	CW	PSC	3.13"	1/4-20 Threaded
EE-8416	16	115	0.41	1550	CW	PSC	3.53"	1/4-20 Threaded
04-R5716	16	115	0.40	1550	CW	PSC	3.13"	1/4-20 Threaded

Cross Reference

Part #	Hussmann	Hill	Tyler	Kysor	True
04-R5730	-	-	-	-	Condenser Fan c/w wiring harness for Pepsi
04-R5711	301263 301264 329646 400603	P41661	-	09A10-054 19A10-055	-
04-R5715	-	-	5215879 5237801	73049	-
04-R5720	254582 302555 411151	P23956	5212930	09A10-056	-

Features

- Shaded pole
- 4 Pole
- Totally Enclosed
- 50/60 Hz
- Long Life Lubricated Sintec Sleeve-Bearings


SLEEVE BEARING

- Duty: Continuous Air-over. Operation: All Angle
- Rotation: CW Opposite Shaft End
- Cord: 21"/23" Lead Length With #10 Ring Studs
- Mounting: 1 Foot, Front Shroud, Tapped Rear 3-Hole
- Included: Nuts, Screws & Fan Blade Adapter



EC-4W115V835
EC-9W115V834
Special cord/plug and shaft/
hub length for Arneg -
34410000, 34410001

EC-34W115V1543
EC-34W230V1542
Special mounting, cord/plug
and shaft/hub length for Ref
Plus - RMT0004, RMT0005

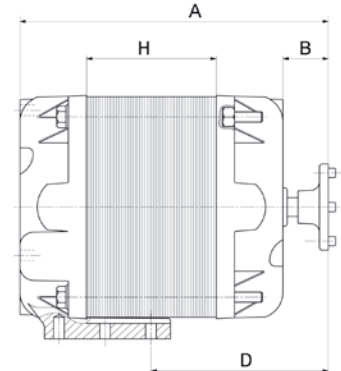

115 & 230 Volt

Part #	Watts	HP	RPM	Volts	Amps	Prot.	Dimensions: mm (")			
							H	A	B	D
EC-4W115	4	1/185	1550	115	0.36	Imp.	13 (.51")	71.5 (2.82")	12.5 (.49")	42 (1.65")
EC-4W115V835		1/185	1550	115	0.40	TH.	13 (.51")	71.5 (2.82")	17 (.68")	42 (1.65")
EC-4W230		1/185	1550	230	0.18	Imp.	13 (.51")	71.5 (2.82")	12.5 (.49")	42 (1.65")
EC-5W115	5	1/150	1550	115	0.40	TH.	13 (.51")	71.5 (2.82")	12.5 (.49")	42 (1.65")
EC-5W230		1/150	1550	230	0.20	TH.	13 (.51")	71.5 (2.82")	12.5 (.49")	42 (1.65")
EC-6W115	6	1/125	1550	115	0.41	Imp.	20 (.79")	77.5 (3.05")	12.5 (.49")	48 (1.89")
EC-6W230		1/125	1550	230	0.20	Imp.	20 (.79")	77.5 (3.05")	12.5 (.49")	48 (1.89")
EC-9W115	9	1/83	1550	115	0.58	TH.	20 (.79")	77.5 (3.05")	12.5 (.49")	48 (1.89")
EC-9W115V834		1/83	1550	115	0.58	TH.	20 (.79")	77.5 (3.05")	17 (.68")	48 (1.89")
EC-9W230		1/83	1550	230	0.35	TH.	20 (.79")	77.5 (3.05")	12.5 (.49")	48 (1.89")
EC-18W115	18	1/47	1550	115	1.0	TH.	30 (1.18")	91.5 (3.6")	16 (.63")	62 (2.44")
EC-18W230		1/47	1550	230	0.5	TH.	30 (1.18")	91.5 (3.6")	16 (.63")	62 (2.44")
EC-34W115	34	1/20	1550	115	1.6	TH.	45 (1.77")	106.5 (4.19")	15.5 (.61")	61 (2.4")
EC-34W115V1543		1/20	1550	115	1.6	TH.	45 (1.77")	106.5 (4.19")	33 (1.3")	61 (2.4")
EC-34W230		1/20	1550	230	0.8	TH.	45 (1.77")	106.5 (4.19")	15.5 (.61")	61 (2.4")
EC-34W230V1542		1/20	1550	230	0.8	TH.	45 (1.77")	106.5 (4.19")	33 (1.3")	61 (2.4")

Notes: Imp. = Impedance. - TH. = Thermal Protection

Fan Blades

Part #	Motor	Diameter: mm (")	Pitch	Blades	Application	Construction
EC-4VEA012	4 & 5 W	154 (6.06")	28°	5	Suction	Plastic
EC-4012309		154 (6.06")	19°	5	Suction	Aluminium
EC-4012543		172 (6.77")	28°	5	Blower	Aluminium
EC-4VEA009	6 & 9 W	200 (7.87")	28°	5	Suction	Plastic
EC-4VEA010		200 (7.87")	34°	5	Suction	Plastic
EC-4VEA013	9 W	230 (9.05")	25°	5	Suction	Plastic
EC-4VEA006	16 W	230 (9.05")	31°	5	Suction	Plastic
EC-4VEA007		254 (10.0")	28°	5	Suction	Plastic

Fan Guards

Part #	Description
EC-1055223	Plastic, 7.87" Dia.
EC-1055224	Plastic, 10" Dia.
EC-1055318	Metal, 9.05" Dia
EC-1055303	Metal, 10" Dia.

Plastic Brackets

Part #	Description
EC-EUBKT01	Bracket for US style Elco Motors



Motor Part #	Blower Part #	HP	Amps	RPM	CFM	Shaft	Bracket Part#	Blower Part #	Dia.	Width	Bore	Rot	Cross
T1-R630	R7-RB20	1/185	0.76	1/1500	60	1.90"×7/32"	92-A8600	93-A7105	5"	1 1/8"	7/32"	CW	013005, EB50
O6-R260	R7-RB22	1/80	0.65	1/1500	75	1.10"×5/16"	92-A8602	66-A508202	5 1/16"	2"	5/16"	CW	B60, 013012, EB60, 4099
O6-R262	R7-RB24 R7-RB25	1/40	1.00	1/1550	130 130	1.50"×5/16"	92-A8602	66-A508216	5 1/16"	2 5/32"	5/16"	CW	B100, K100, 013011, 4105
O6-R264	R7-RB26	1/60	0.95	1/1550	141	1.80"×5/16"	92-A8604	66-A610215	6 1/16"	2 5/32"	5/16"	CW	QK100, 013020
O6-R265	-	1/75	0.65	1/1400	115	1.63"×5/16"							QB100
O6-R266	R7-RB28	1/20	1.65	1/1550	201	1.40"×5/16"	92-A8604	66-A610215	6 1/16"	2 5/32"	5/16"	CW	BK100, 013024, 4115
O6-R267	-	1/50	0.80	1/1550	118	1.50"×5/16"							BB-100, 013019
M3-R2603	R7-RB30	1/35	1.15	1/1550	268	2.20"×1/2"	92-A8606	66-A610220	6 1/16"	2 5/32"	1/2"	CW	DK260, DB200, 75003, 013041, 013040, 4143
M3-R2604	-	1/10	2.87	1/1550	300	2.00"×1/2"							DB300, 013062, 013042
M4-R2605	-	1/12	3.00	1/1050	450	1.60"×1/2"							QBD300

3.3" Refrigeration Motors



120 Volt

Part #	HP	RPM	Amps	Rot	Type	Encl.	Body	Shaft	Bearing	Cross Ref
R3-R326	1/110	1/1550	0.40	CW	SP	Open	2.09"	1.4"×1/4"	Sleeve	Blanchard, Bohn
O6-R230	1/70	1/2800	0.64	CCW	SP	Open	2.30"	1.3"×1/4"	Sleeve	Coldstream
R3-R205	1/35	1/1550	1.20	CW	SP	Open	2.50"	1.8"×1/4"	Sleeve	Keeprite
R3-R360	1/35	1/1550	1.00	CW	SP	Open	2.60"	1.6"×1/4"	Sleeve	Keeprite
R3-R291	1/30	1/1550	1.30	CW	SP	Open	2.50"	1.6"×1/4"	Sleeve	Keeprite
R3-R318	1/25	1/1550	1.50	CW	SP	Open	2.84"	2.8"×5/16"	Sleeve	Bohn
R3-R370	1/20	1/1550	0.75	CW	PSC	Open	3.98"	2.7"×5/16"	Ball	Keeprite
US-R90574	1/20	1/1550	1.90	CW	SP	Open	2.75"	2.48"×5/16"	Sleeve	Larkin, Heatcraft
R3-R358	1/20	1/1550	2.00	CCW	SP	Open	3.35"	3.2"×5/16"	Sleeve	Blanchard, Bohn
R3-R1052	1/20	1/1550	2.00	CCW	SP	Open	3.10"	3.2"×5/16"	Ball	Keeprite, Blanchard
R3-R368	1/20	1/1550	1.7	CW	SP	Open	2.70"	2.7"×5/16"	Sleeve	Ref Plus
US-R90572	1/15	1/1550	1.80	CCW	SP	Open	3.00"	3.03"×5/16"	Sleeve	Bohn, Heatcraft
R3-R313	1/15	1/1550	2.20	CCW	SP	Open	3.60"	3.0"×5/16"	Ball	Krack 1055, Bohn, Blanchard, Torin 7627401



240 Volt


Part #	HP	RPM	Amps	Rot	Type	Encl.	Body	Shaft	Bearing	Cross Ref
R3-R371	1/20	1550	0.38	CW	PSC	OPEN	3.98"	2.7"x5/16"	Ball	Keeprite
US-R90575	1/20	1550	0.89	CW	SP	OPEN	2.75"	2.48"x5/16"	Sleeve	Larkin, Heatcraft
R3-R369	1/20	1550	0.90	CW	SP	OPEN	2.70"	2.7"x5/16"	Sleeve	Ref Plus
R3-R1053	1/20	1550	1.00	CCW	SP	OPEN	3.10"	3.2"x5/16"	Ball	Keeprite, Blanchard
R3-R359	1/20	1550	1.00	CCW	SP	OPEN	3.35"	3.2"x5/16"	Sleeve	Keeprite, Blanchard
US-R90573	1/15	1550	1.20	CCW	SP	OPEN	3.50"	3.14"x5/16"	Sleeve	Bohn, Heatcraft
R3-R314	1/15	1550	1.30	CCW	SP	OPEN	3.60"	3.0"x5/16"	Sleeve	Krack, Torin, Bohn, Blanchard

115/230 Volt

Part #	HP	RPM	Amps	Rot	Type	Encl.	Body	Shaft	Bearing	Cross Ref
US-R91189	1/20	1550	1.6-0.8	CCW	SP	TE	3.15	1.65"x5/16"	Sleeve	Krack
US-R90721	1/12	1550	1.1-0.6	REV	PSC	OPEN	3.59	3.15"x5/16"	Ball	Bohn, Heatcraft, Larkin
US-R90671	1/15	1550	2.1-1.1	CW	SP	OPEN	5.00	2.24"x5/16"	Ball	GE 11 frame replacement
US-R90672	1/15	1550	2.1-1.1	CCW	SP	OPEN	5.00	2.24"x5/16"	Ball	GE 11 frame replacement

5.0" Diameter Incremental / PTAC Fan & Blower Motors

- 1/10 HP • 42 Frame • CCW Rotation • Double Shaft
- Open Construction • Sleeve Bearing • Base Inc.

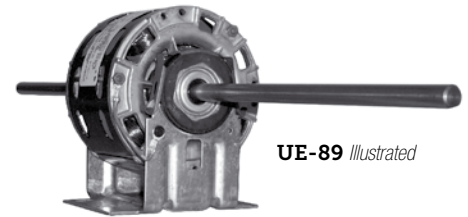

UE-89 Illustrated

General Replacement For: Carrier, Chromalox, Trane, Dunham Bush

Part #	RPM	Volts	Amps	Type	Shaft	Cross Reference
M4-R2634	5/1050	120	3.50	SP	10.2" x 1/2" x 10.2"	UE89, GE 2089, Fasco D289
UE-89	5/1050	120	3.50	SP	10.2" x 1/2" x 10.2"	GE 2089, Fasco D289
M4-R2693	5/1050	120	3.20	SP	8.0" x 3/8" x 8.0"	UE93, GE 2093, Fasco D293
M4-R2635	4/1050	208/230	1.60	SP	9.0" x 1/2" x 9.0"	UE320, GE 2907, Fasco D251
M4-R2362*	4/1075	120	1.70	PSC	9.8" x 1/2" x 9.8"	UE362, GE 2362, Fasco D291
M4-R2381*	4/1075	208/230	0.80	PSC	9.0" x 1/2" x 9.0"	UE381, Fasco D292

* - PSC - 5/370 Cap.

5.5" Diameter Air Conditioning Motors

- 48 Frame (5 5/8") • 1075 RPM • 3 Speed • CCW • PSC • Open • Sleeve Bearings • Resilient Ring
- 1 1/2" thru Bolt Mount with Length Adaptor • Fixed Lead End • Thermal Protection • Adjustable Base Inc.

Part #	HP	Volts	Amps	Cap	Shaft
M1-R52126	1/6	120	3.10	5/370	7.5" x 1/2" x 8.2"
M1-R52114	1/4	120	4.40	5/370	6.3" x 1/2" x 6.5"
M1-R52101	1/3	120	6.80	5/370	6.8" x 1/2" x 8.0"
M1-R52761	1/2	120	7.60	7.5/370	6.8" x 1/2" x 7.4"
M1-R52118	1/6	208/230	1.20	5/370	7.5" x 1/2" x 8.2"
M1-R52113	1/4	208/230	1.90	5/370	7.5" x 1/2" x 8.0"
M1-R53676*	1/4	208/230	1.90	5/370	7.5" x 1/2" x 8.0"
M1-R52102	1/3	208/230	2.60	5/370	7.8" x 1/2" x 8.3"
M1-R53686*	1/3	208/230	1.90	5/370	7.8" x 1/2" x 8.3"
M1-R52107	1/2	208/230	3.40	7.5/370	7.7" x 1/2" x 6.2"
M1-R53696*	1/2	208/230	2.76	7.5/370	7.7" x 1/2" x 6.2"
M1-R52489	3/4	208/230	5.00	7.5/370	6.8" x 1/2" x 7.5"

* No Adapter Kit Base



M1-R52113 Illustrated

**REPLACEMENT FOR:
Large Window and
Through The Wall
Air Conditioners**

3.3" PSC General Replacement Refrigeration Motor

Features

- High Efficiency PSC
- Dual Voltage
- Ball Bearing
- Reversing Plug
- Will Replace Dozens of 1/12, 1/15, & 1/20 HP PSC and Shaded Pole Motors
- Mounting Studs Front & Rear (nuts included)

TruckStock™
STANDARD



Part #	Amps	SPD/RPM	Volts	HP	Rot	Shaft	Body	Feature
US-R90721	1.1/0.6	1/1550	115/ 208/230	1/12	REV	3.15"x5/16"	3.59"	PSC/Cap Inc.

Cross Reference

Part #	Emerson	A.O.Smith	Fasco	GE	Heatcraft	Larkin
US-R90721	9650, 9651, 9652, 9653, 9656, 9664	9721 9702A	D1101, D1103, D1122, D1123, D1124, D1125, D1126, D1152, D1154, PD1125, D1127, 7163- 2113, 7163-3371, 7190-0442, 7190-2084, 7190-2255, 7190-2285, 7190-2969	5KSM59ES2001 5KSM59JSK1435 5KSM59JS5036S 5KSM59LS2262AS	25308601 25309101 2531194 2531195	7071061

3.3" General Replacement Refrigeration Motors

Features

- Class B Insulation
- Open
- Single Shaft
- Shaded Pole
- Heavy Duty Ball Bearing
- Thermally Protected
- Single Speed
- Four studs on each end with extra mounting nuts

Benefits

- One motor replaces 1/25, 1/30, 1/40 & 1/50 horse powers with one simple connection
- Replaces hundreds of the most popular 3.3" motors currently installed
- Great TruckStock™ motors are a must-have for any contractor who offers 24-hour emergency service.

TruckStock™
STANDARD



Part #	HP	Volts	Amps	RPM	Dia	Rot	Type	Body	Shaft
R3-R376	1/25 - 1/50	115	1.6 - 1.4	1550	3.3"	CCW	SP	2.75"	5/16" x 2.5"
R3-R375	1/25 - 1/50	115	1.6 - 1.4	1550	3.3"	CW	SP	2.75"	5/16" x 2.5"

Cross Reference

Rotom	Mars	Packard	Fasco	A.O. Smith
R3-R376	05528	40030	D184	3325CW
	05526	40514	D514	-
	05524	40126	D126	-
R3-R375	05527	40031	D515	3325CCW
	05525	40515	D127	-
	05523	40127	-	-


5.0" Diameter Motors

21/29 Frame Replacement Motors

Features

- Easy to install
- Triple voltage (115/208/230)
- All angle
- Sleeve bearing
- 3/8" shaft with 1/2" adapter included
- Complete with resilient base
- Longer shafts
- Automatic reset thermal overload protector
- 30" colour coded leads with grommet exit
- Mechanically reversible
- 1/10 HP rating replaces G.E. 1/20, 1/15, & 1/10 motors
- Strap, stud or base mount
- 2 1/4", 2 1/2 Resilient rings
- 2 5/8" Shaft height

These specially designed Rotom motors will replace hundreds of Universal, Fasco & G.E. 21/29 frame motors. This means reduced inventory, better turnover, competitive prices and increased profits.

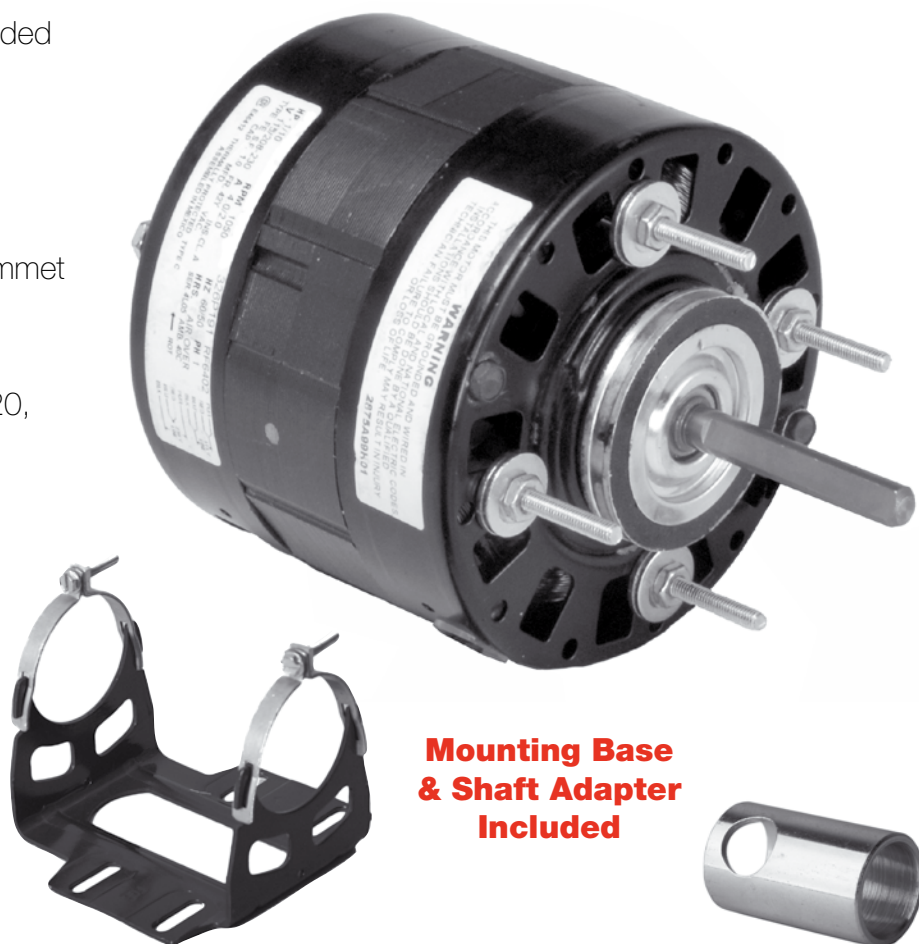

**Mounting Base
& Shaft Adapter
Included**

Used on many commercial condensing units such as Copeland, Tecumseh, Hussmann & Tyler as well as unit cooler fans and blowers, refrigeration cabinets, unit heaters, space heaters, remote air conditioners, blower units and other air moving applications.


Part #	HP	Volts	Amps	RPM	Dia	Rot	Type	Body	Shaft	Comment
M4-R2930	1/10	115/208/230	4.0	1/1050	5.0"	CCW	SP	4.80"	2.3" x 3/8"	GE2121, 2122, 2223, 2321, 2322, RF6402
M4-R2940	1/10	115/208/230	4.0	1/1050	5.0"	CW	SP	4.80"	2.3" x 3/8"	GE2113, 2213, 2311, 2312, RF6403
M4-R2942	1/10	115/208/230	4.0	1/1550	5.0"	CCW	SP	4.80"	2.3" x 3/8"	GE2141, 2142, 2241, 2242, 2341, 2342, RF4400
M4-R2932	1/10	115/208/230	4.0	1/1550	5.0"	CW	SP	4.80"	2.3" x 3/8"	GE2131, 2132, 2231, 2232, 2331, 2332, RF4401

Included


- Durable collar studs with 5/8" extension, 8-32 threads
- Extra mounting nuts with locking feature
- Easy-to-install plugs
- Mounting instructions with easy-to-read diagrams

Features

- North American Made
- Multi-Mounting System
- Single speed multi-horsepower replacement motor uses one simple connection
- Energy-efficient PSC design
- Easy-to-read connection diagram attached to white lead wire
- Water-resistant reversing plug
- Double sealed ball bearings for dependable long life
- Rubber shaft slinger keeps water and dirt out of motor
- Water-resistant rubber grommet at lead opening
- 60°C max ambient
- Class B insulation
- Lead length 36"
- 60 Hertz
- Totally enclosed
- Continuous duty, air over
- All-angle mount



**Replaces motors with
a 4.33, 4.42 and 4.62
inch mounting bolt
circle**

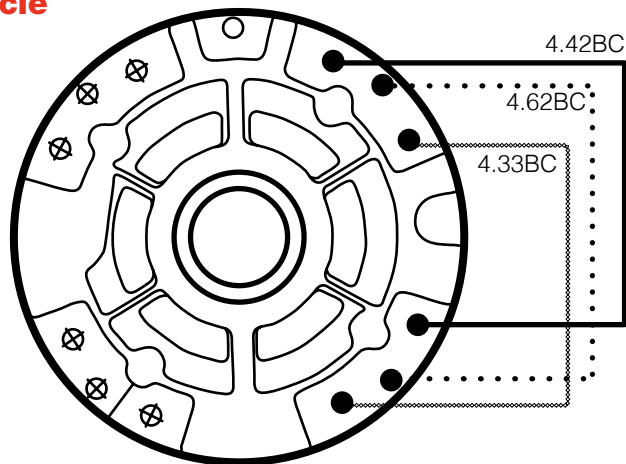

Mounting System Replaces:

4.42BC

AOS/Westinghouse Design
Emerson 42-Frame (5" dia.)

4.62BC

GE 42-Frame (5" dia.)
Fasco 42-Frame (5" dia.)
AOS/Universal Electric Design

4.33BC

Emerson Clam-Shell
GE Cap-Can

Part #	HP	Volts	Amps	RPM	Dia	Rot	Type	Body	Shaft
M4-R2722	1/8, 1/10, 1/12	208/230	0.9	1/1075	5.0"	Rev	5/370	4.0"	1/2" x 3"
M4-R2723	1/4, 1/5, 1/6	208/230	2.0	1/1075	5.0"	Rev	7.5/370	4.5"	1/2" x 3"
M4-R2724	1/4, 1/5, 1/6	208/230	1.6	1/1625	5.0"	Rev	5/370	4.5"	1/2" x 3"

M4-R2722

HP	RPM	Amps
1/8	1075	0.9
1/10	1135	0.6
1/12	1155	0.5

M4-R2723

HP	RPM	Amps
1/4	1075	2.0
1/5	1145	1.2
1/6	1165	1.0

M4-R2724

HP	RPM	Amps
1/4	1625	1.6
1/5	1715	1.0
1/6	1759	0.7

* MultiFit™ is a trademark of A.O. Smith Corporation

5.5" Condenser Fan Replacement Motors


Features

- North American Made
- Multi-application Condenser Fans
- Available in sleeve bearing or ball bearing
- Short 4" body
- Rheem mounting holes and screws supplied
- All Angle Mounting
- Class B or F insulation
- Energy Efficient PSC Design
- Removable Drain Plugs
- Reversible
- 60° or 70°C Ambient

**Shaft Up, Down
or Horizontal**

**TruckStock™
PREMIUM**

Replacement For: Rheem
Emerson 1/6 Hp, 51-20668-11
K55HXTDD-8385 1/5 Hp, 51-23055-11
Catalog No. 5458 1/4 Hp, 51-23054-11
Consolidator II 1/3 Hp, 51-23053-11

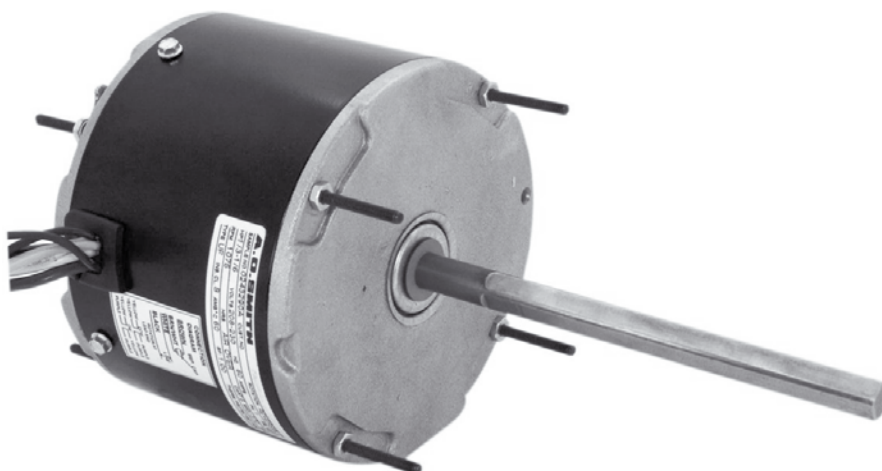

60°C Ambient - Class B Insulation


Part #	HP	Volt	Amps	Capacitor	RPM	Rot.	Encl.	Mount	Body	Bearing	Shaft
M2-R22403	1/3-1/8	208-230	2.1	7.5/370V	825	Rev	T.E.	Belly Band, Thrubolts or Shell Holes	4.875"	Sleeve	6.7" x 1/2"
M2-R22404	1/3-1/6	208-230	2.1	7.5/370V	825	Rev	T.E.		4.875"	Ball	6.7" x 1/2"
M2-R22401	1/3-1/6	208-230	2.0	7.5/370V	1075	Rev	T.E.		4.125"	Sleeve	6.7" x 1/2"
M2-R22402	1/3-1/6	208-230	2.0	7.5/370V	1075	Rev	T.E.		4.125"	Ball	6.7" x 1/2"

70°C Ambient - Class F Insulation

Part #	HP	Volt	Amps	Capacitor	RPM	Rot.	Encl.	Mount	Body	Bearing	Shaft
M2-R22405	1/8-1/15	208-230	1.0	5/370V	825	Rev	T.E.	Belly Band, Thrubolts or Shell Holes	4.50"	Sleeve	6.5" x 1/2"
M2-R22408	1/8-1/15	208-230	0.8	5/370V	825	Rev	T.E.		4.50"	Ball	6.5" x 1/2"
M2-R22418	1/8-1/15	208-230	0.8	5/370V	1075	Rev	T.E.		4.00"	Sleeve	6.5" x 1/2"
M2-R22420	1/8-1/15	208-230	0.8	5/370V	1075	Rev	T.E.		4.00"	Ball	6.5" x 1/2"
M2-R22410	1/3-1/8	208-230	2.1	7.5/370V	825	Rev	T.E.		4.875"	Sleeve	6.5" x 1/2"
M2-R22412	1/3-1/8	208-230	2.1	7.5/370V	825	Rev	T.E.		4.875"	Ball	6.5" x 1/2"
M2-R22415	1/3-1/8	460	2.1	7.5/370V	825	Rev	T.E.		5.125"	Ball	6.5" x 1/2"
M2-R22422	1/3-1/6	208-230	2.0	7.5/370	1075	Rev	T.E.		4.125"	Sleeve	6.5" x 1/2"
M2-R22425	1/3-1/6	208-230	2.0	7.5/370	1075	Rev	T.E.		4.125"	Ball	6.5" x 1/2"
M2-R22428	1/3-1/6	460	1.2	7.5/370	1075	Rev	T.E.		4.875"	Ball	6.5" x 1/2"
M2-R22430	1/2-1/5	208-230	2.5	10/370	825	Rev	T.E.		5.61"	Ball	6.5" x 1/2"
M2-R22435	1/2-1/5	208-230	3.6	10/370	1075	Rev	T.E.		5.36"	Ball	6.5" x 1/2"
M2-R22438	1/2-1/5	460	1.5	10/370	1075	Rev	T.E.		5.61"	Ball	6.5" x 1/2"

Features

- Multi-Rating Cap Supplied
- North American Made
- Less Inventory Required!
- Versatile!
- Time Saver!
- Easy Installations!
- Energy Efficient
- Different Capacitor/Speed Combos
- Designed for 370V Cap
- Reversible Rotation
- Extended Thru Bolts
- Automatic Protector
- Class B Insulation
- Continuous Duty Air Over
- Mounts by Belly Band, Thru Bolts or Shell Holes
- Rheem Mounting Holes in Shell
- 60 Hz

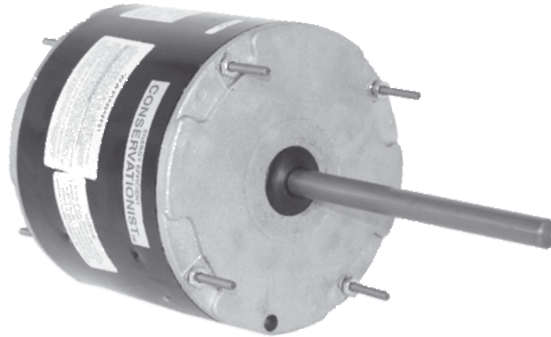

**Totally Enclosed
Air Over - 60°C Ambient**



**Supplied Free In
Every Box**

All-Purpose Capacitor

- Multi-Rating Capacitor
- 5, 7.5, 10, 12.5 & 15 MFD

Part #	HP	Spd.	RPM	Volt	Amps	Cap. (370V)		Bearing	Leads	Body	Shaft	
						208V	230V					
M2-R22601	1/3	High	825	208-230	1.9	10	mfd	7.5	Ball	36"	5.24"	1/2"×5"
	1/4				1.5							
	1/5	Low			1.2							
	1/6				1.0							
M2-R22603	1/2	High	825	208-230	2.4	12.5	mfd	10	Ball	36"	5.61"	1/2"×6"
	1/3				1.7							
	1/4	Low			1.4							
	1/5				1.1							
M2-R22600	1/3	High	1075	208-230	2.8	7.5	mfd	5	Sleeve	36"	4.86"	1/2"×6"
	1/4				2.0							
	1/5	Low			1.7							
	1/6				1.5							
M2-R22605	1/3	High	1075	208-230	2.8	7.5	mfd	5	Ball	36"	4.86"	1/2"×6"
	1/4				2.0							
	1/5	Low			1.7							
	1/6				1.5							
M2-R22602	1/2	High	1075	208-230	3.9	12.5	mfd	10	Ball	36"	5.24"	1/2"×5"
	1/3				2.2							
	1/4	Low			1.6							
	1/5				1.3							
M2-R22604	3/4	High	1075	208-230	5.3	15	mfd	12.5	Ball	36"	5.87"	1/2"×6"
	1/2				3.0							
	1/3	Low			1.9							
	1/4				1.0							

Cross Reference


Rotom	Emerson	Genteq	Fasco	Marathon	A.O. Smith
M2-R22601	5464, 5464H	3469, 3469HS	D2826	-	FE6001F
M2-R22603	-	-	-	-	FE6003F
M2-R22600					
M2-R22605	5462, 5462H	3465, 3465HS	D2827	X072	FE6000F
M2-R22602	5465, 5465H	3468, 3468HS	-	X076	FE6002F
M2-R22604	-	-	-	-	FE6004F

5.5" Condenser Fan Motors

Condenser Fan Motors Features

T.E. - All Angle!

- 48Y Frame
- 5.5" Diameter
- Totally Enclosed - All Angle
- Mounting: Stud & Strap
- 60 Hz
- Rain Shields
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 25.6" Coloured Electrical Leads
- 60°C Ambient (where noted)
- Insulation Class B
- Thermally Protected

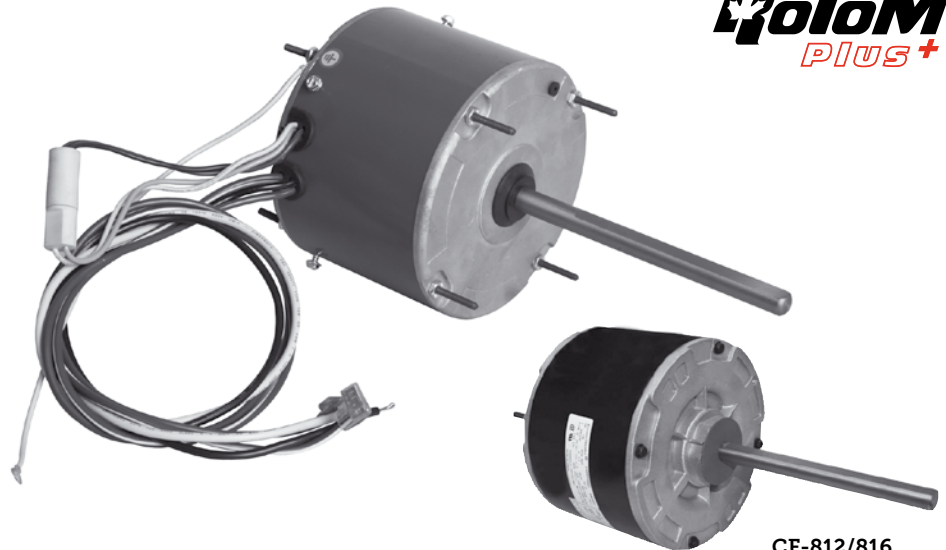

**24 Month
Warranty**

Applications:

Residential & commercial outdoor air conditioning condensers & refrigeration condensers.

Condenser Fan

Part #	HP	Voltage	Amps	Cap.	RPM	Rotation	A Dim.	Bearing	Shaft
CF-3726*	1/6	208/230	1.3	5/370	1/1075	Revers.	4.25"	Ball	5.5" x 1/2"
CF-816	1/6	208/230	1.1	5/370	1/825	Revers.	4.25"	Ball	6.0" x 1/2"
CF-3732*	1/4	208/230	2.2	5/370	1/1075	Revers.	4.25"	Ball	5.5" x 1/2"
CF-814	1/4	208/230	1.5	5/370	1/825	Revers.	5.00"	Ball	6.5" x 1/2"
CF-3733	1/3	208/230	2.8	7.5/370	1/1075	Revers.	4.50"	Ball	6.0" x 1/2"
CF-813	1/3	208/230	1.9	7.5/370	1/825	Revers.	5.00"	Ball	6.5" x 1/2"
CF-3734	1/2	208/230	4.2	10/370	1/1075	Revers.	5.50"	Ball	6.5" x 1/2"
CF-812	1/2	208/230	2.7	10/370	1/825	Revers.	5.61"	Ball	6.0" x 1/2"
CF-3735	3/4	208/230	4.5	10/370	1/1075	Revers.	5.75"	Ball	5.5" x 1/2"

Capacitor Not Included

*60°C Ambient

Cross Reference

Rotom	HP	Bearing	AO Smith	Diversitech	Emerson	Fasco	Embraco	GE	Marathon	Packard	UE	Rotom
CF-3726	1/6	Sleeve	FSE1016S, SV1	WG840727	1859	D917		3727	X411		184	R31700
	1/6	Ball	FE1016S						X427			
CF-816	1/6	Ball	EM3403							60825		
CF-3732	1/4	Sleeve	FSE1026S, SV1	WG840728	1860	D909	E221	3728	X412		176	R31702
	1/4	Ball	FE1026S, SB		1876	D7909		3732	X428			
CF-814	1/4	Sleeve	FSE1028S		1874	D934, D797			X450		474, 739	R22445
	1/4	Ball	FE1028S, F1028			D792		3040	X097			
CF-3733	1/3	Sleeve	FSE1036S, SV1	WG840729	1861	D908	E222	3729	X413		175	R31703
	1/3	Ball	FE1036S, SB		1877	D7908		3733				
CF-813	1/3	Sleeve	FSE1038S		1875	D936, D796			X451		475, 740	R22345
	1/3	Ball	FE1038S, F1038			D791		3026	X086		476	
CF-3734	1/2	Sleeve	FSE1056S, SV1	WG840730	1862	D907	E223	3730	X414		187	R31705
	1/2	Ball	FE1056S, SB		1878	D7907		3734			5578	
CF-812	1/2	Ball	EM3746									
CF-3735	3/4	Sleeve	FSE1076S, SV1		1868			3731	X095		779	R31706
	3/4	Ball	FE1076S		1879	D931		3735			668	

Motors Are Sleeve Bearing Unless Indicated - Rotation Determined Opposite Shaft End (Double Shaft Determined By Lead End)

5.5" Dia. Totally Enclosed Condenser Fan Motors


- 60°C Ambient • High Efficiency PSC • 48 Frame • All Angle
- Reversing Plug • 6.0" x 1/2" Shaft • 1 1/2" Extended Thru Bolts Both Ends

DIRECT REPLACEMENT FOR:

- Armstrong
- Carrier
- Climate Master
- Comfortaire
- Frigidaire
- Goodman
- ICP
- Lennox
- Miller
- Olsen
- Rheem Ruud
- York
- Trane

**High Ambient &
Energy Efficient**

**Totally Enclosed
All Angle**

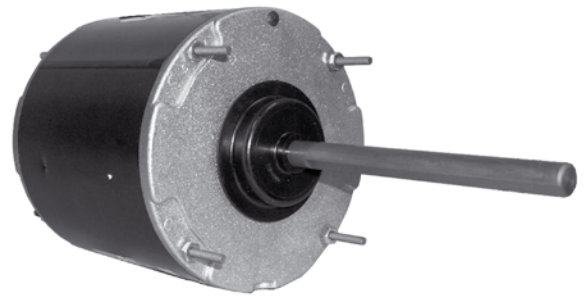

460 Volt - Single Phase

Part #	H.P.	RPM	Amps	Bearing	Cap
M2-R31710*	1/4	1075	0.80	Ball	7.5/370
M2-R31712	1/3	1075	0.90	Ball	7.5/370
M2-R31718	1/2	1050	1.40	Ball	10/370
M2-R31716*	3/4	1075	2.70	Ball	10/370

575 Volt - Single Phase

Part #	H.P.	RPM	Amps	Bearing	Cap
R6-R42604	1/3	1100	0.80	Ball	7.5/440
R6-R42605	1/2	1625	1.00	Ball	7.5/440
R6-R42606		1100	1.10	Ball	7.5/370
R6-R42607	3/4	1075	1.60	Ball	15/370


Anti Windmill Brake

Helps Eliminate Motor Burnout

Part #	Description
92-AW12	For 1/2" Shaft
92-AW58	For 5/8" Shaft



STOPS
ROOFTOP CONDENSER MOTORS
REVERSING WHEN IDLE



5.5" Condenser Fan and Direct Drive Motors

Features

- Economical TruckStock Option!
- Less Inventory Required!
- Versatile!
- Time Saver!
- Easy Installations!
- Energy Efficient
- Different Capacitor/Speed Combos
- Designed for 370V Cap
- Reversible Rotation
- Extended Thru Bolts
- Automatic Protector
- Class B Insulation
- Continuous Duty-Over Air
- Mounts by Belly Band, Thru Bolts or Shell Holes
- Rheem Mounting Holes in Shell
- 60 Hz

TruckStock™
STANDARD


Condenser Fan

Part #	HP	Spd.	RPM	Volt	Amps	Cap	Bearing	Leads	Body	Shaft
M2-R23469	1/3-1/5	Two	825	208-230	1.9-1.2	10/370 or 7.5/370	Ball	26"	5.24"	1/2"×6"
M2-R23465	1/3-1/5	Two	1075	208-230	2.8-1.7	7.5/370 or 5/370	Ball	26"	4.86"	1/2"×6"
M2-R23468	1/2-1/4	Two	1075	208-230	3.9-1.6	12.5/370 or 10/370	Ball	26"	5.24"	1/2"×6"

Cross Reference

Rotom	Diversitech	Smart	A.O. Smith
M2-R23469	WG840469	SE3469	EM3469
M2-R23465	WG840465	SE3465	EM3465
M2-R23468	WG840468	SE3468	EM3468

Direct Drive

Part #	HP	Spd.	RPM	Volt	Amps	Cap	Bearing	Leads	Body	Shaft
R6-R43463	1/2-1/6	Four	1075	115	7.0	10/370, 7.5/370, 5/370	Sleeve	38"	4.86"	1/2"×5"
R6-R43464	1/2-1/6	Four	1075	208-230	3.9	10/370, 7.5/370, 5/370	Sleeve	38"	4.86"	1/2"×5"
R6-R43466	3/4-1/5	Four	1075	115	9.1	10/370, 7.5/370, 5/370	Sleeve	38"	4.86"	1/2"×5"
R6-R43467	3/4-1/5	Four	1075	208-230	3.9	10/370, 7.5/370, 5/370	Sleeve	38"	4.86"	1/2"×5"


Cross Reference

Rotom	A.O. Smith	Emerson	Genteq	Fasco	Marathon	Diversitech	Smart	Carrier	Carrier	York
R6-R43463	EM3463	5460	3463	D2835	X077	WG840463	SE3463	P257-E5460	T257-3463	S1-FHM3463
R6-R43464	EM3464	5461	3464	D833	X073	WG840464	SE3464	P257-E5461	T257-3464	S1-FHM3464
R6-R43466	EM3466	5470	3466	D2834	X074	WG840466	SE3466	P257-E5470	T257-3466	S1-FHM3466
R6-R43467	EM3467	5471	3467	D2833	X075	WG840467	SE3467	P257-E5471	T257-3467	S1-FHM3467

Features

- Multi-Rating Cap Supplied
- North American Made
- Less Inventory Required!
- Versatile!
- Time Saver!
- Easy Installations!
- Energy Efficient
- Different Capacitor/Speed Combos
- Designed for 370V Cap
- Reversible Rotation
- Resilient Rings
- Extended Thru Bolts
- Automatic Protector
- Class B Insulation
- 48 Frame
- Continuous Duty Air Over
- Belly Band, Thru Bolts or Shell Holes
- Rheem Mounting Holes in Shell
- 60 Hz

**Open Drip Proof
40°C Ambient**

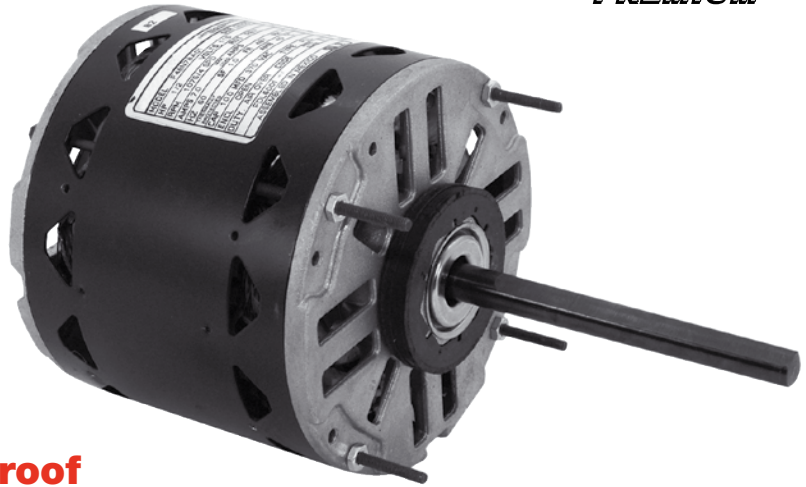

TruckStock™
PREMIUM



**Supplied Free In
Every Box**

All-Purpose Capacitor

- Multi-Rating Capacitor
- 5, 7.5, 10, 12.5 & 15 MFD

Part #	HP	Spd.	RPM	Volt	Amps	Capacitor (370V)	Bearing	Leads	Body	Shaft
R6-R43600	1/2	All	1075	115	7.0	10 mfd	Sleeve	26"	4.86"	1/2"×5"
	1/3	All			6.7	5 mfd 7.5*				
	1/4	Lo, Med-Lo, Med-Hi			4.4					
	1/5	Low, Med-Lo			3.2					
	1/6	Lo			2.4					
R6-R43601	1/2	All	1075	208-230	3.9	10 mfd	Sleeve	26"	4.86"	1/2"×5"
	1/3	All			3.6	5 mfd 7.5*				
	1/4	Lo, Med-Lo, Med-Hi			2.5					
	1/5	Lo, Med-Lo			1.8					
	1/6	Lo			1.3					
R6-R43602	3/4	All	1075	115	9.1	10 mfd	Ball	38"	4.86"	1/2"×5 1/2"
	1/2	All			6.8	5 mfd 7.5*				
	1/3	All			5.5					
	1/4	Lo, Med-Lo, Med-Hi			3.0					
	1/5	Lo, Med-Lo			2.3					
R6-R43603	3/4	All	1075	208-230	3.9	10 mfd	Ball	38"	4.86"	1/2"×5 1/2"
	1/2	All			3.6	5 mfd 7.5*				
	1/3	All			3.0					
	1/4	Lo, Med-Lo, Med-Hi			2.3					
	1/5	Lo, Med-Lo			2.0					

* Motor is approximately 10% stronger and has higher starting torque for 1/6, 1/5, 1/4 and 1/3 HP rating with the 7.5 mfd 370VAC capacitor.

Cross Reference

Rotom	Emerson	Genteq	Protech	Fasco	Marathon	A.O. Smith
R6-R43600	5460	3463	51-23012-41	D2835	X077	FDL6001A
R6-R43601	5461	3464	51-23022-41	D833	X073	FD6000A
R6-R43602	5470	3466	-	D2834	X074	FDL6002A
R6-R43603	5471	3467	-	D2833	X075	FD6001A

Features

- 48Y Frame
- 5.5" Diameter
- Open Enclosure
- Mounting: Stud, Strap & Base (Resilient Rings)
- 60 Hz
- Sleeve Bearing
- Shaft: 4.0" x 1/2"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 40°C Ambient
- Insulation Class B
- Thermally Protected

40°C Ambient

**Rotom
Plus+**

**24 Month
Warranty**



92-A8617

Torsion Flex Bracket
5.0" & 5.5" Dia.

9" & 10" Bolt Circles



92-A8550 - 5" Diameter

92-A8555 - 5.5" Diameter

9" & 10" Bolt Circles



5.5" Diameter for

1/2 HP and above

92-A8556 - 9" Bolt Circle

92-A8557 - 10" Bolt Circle

HEAVY DUTY

115 & 208/230 Volt, 3 Speed, 1075 RPM, Reversible Rotation

Part #	HP	Volts	Amps	Cap.	SPD/RPM	Rotation	Body	Bearing	Shaft
DD-3583	1/4	115	4.8	5/370	3/1075	Revers.	4.22"	Sleeve	1/2"x4.0"
DD-3584	1/4	208/230	2.0	5/370	3/1075	Revers.	4.22"	Sleeve	1/2"x4.0"
DD-3585	1/3	115	5.5	7.5/370	3/1075	Revers.	4.37"	Sleeve	1/2"x4.0"
DD-3586	1/3	208/230	2.8	5/370	3/1075	Revers.	4.48"	Sleeve	1/2"x4.0"
DD-3587	1/2	115	7.5	10/370	3/1075	Revers.	5.25"	Sleeve	1/2"x4.0"
DD-3588	1/2	208/230	3.6	10/370	3/1075	Revers.	5.23"	Sleeve	1/2"x4.0"
DD-3589	3/4	115	10.2	15/370	3/1075	Revers.	5.48"	Sleeve	1/2"x4.0"
DD-3590	3/4	208/230	5.4	10/370	3/1075	Revers.	5.48"	Sleeve	1/2"x4.0"

Capacitor Not Included

Cross Reference


Rotom	AO Smith	AO Smith	Emerson	Genteq	Fasco	Marathon	Packard	Diversitech	Smart	Carrier	Carrier	York	UE	Rotom
DD-3583	EM3583	DL1026	1863	3583	D721	X000	43583	WG840583	SE3583	P257-8583	P257-3583	S1-FHM3583	533	R43583
DD-3584	EM3584	D1026	1971	3584	D725	X001	43584	WG840584	SE3584	P257-8584	P257-3584	S1-FHM3584	530	R43584
DD-3585	EM3585	DL1036	1864	3585	D727	X002	43585	WG840585	SE3585	P257-8585	P257-3585	S1-FHM3585	532	R43585
DD-3586	EM3586	D1036	1972	3586	D923	X003	43586	WG840586	SE3586	P257-8586	P257-3586	S1-FHM3586	529	R43586
DD-3587	EM3587	DL1056	1865	3587	D701	X004	43587	WG840587	SE3587	P257-8587	P257-3587	S1-FHM3587	531	R43587
DD-3588	EM3588	D1056	1973	3588	D703	X005	43588	WG840588	SE3588	P257-8588	P257-3588	S1-FHM3588	528	R43588
DD-3589	EM3589	DL1076	8904	3589	D728	X009	43589	WG840589	SE3589	P257-8589	P257-3589	S1-FHM3589	678	R43589
DD-3590	EM3590	D1076	8905	3590	D729	X010	43590	WG840590	SE3590	P257-8590	P257-3590	S1-FHM3590	679	R43590

Features

- 48Y Frame
- 5.5" Diameter
- Open Enclosure
- Mounting: Flex
- 60 Hz
- Sleeve Bearing (except DD-035 & DD-036 are Ball Bearing)
- Shaft: 1/2" x 6"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 60" Coloured Electrical Leads
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

**9" & 10"
Bolt
Circle**

**24 Month
Warranty**

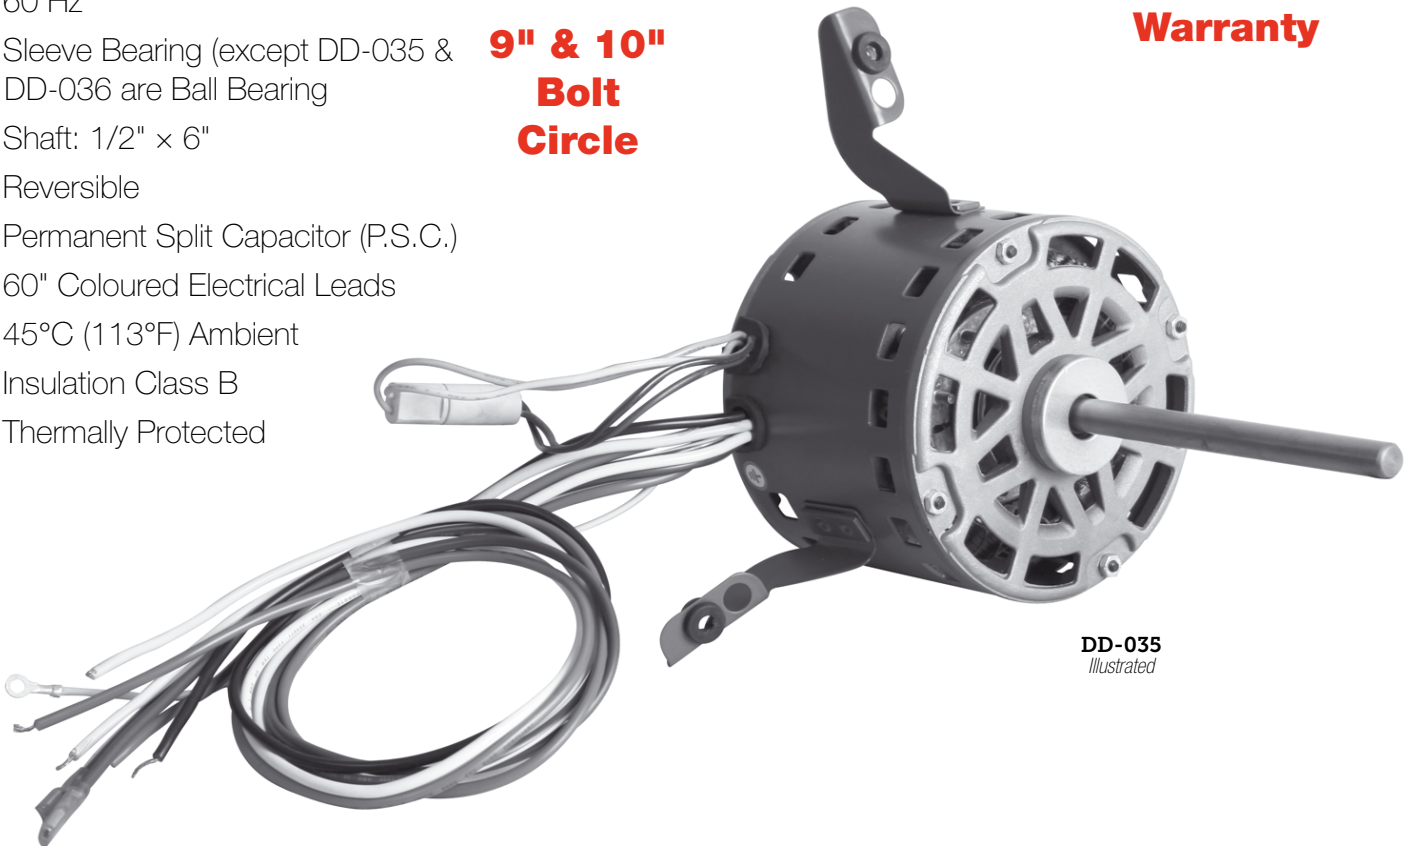

DD-035
Illustrated

115 & 208/230 Volts, 4 Speed, 1075 RPM, Reversible Rotation

Part #	HP	Volts	Amps	Cap.	A Dim.	Bearing	Shaft
DD-034	1/4	115	3.6	5/370	3.40"	Sleeve	1/2"x6"
DD-044		208/230	1.7	5/370	3.40"	Sleeve	1/2"x6"
DD-035	1/3	115	5.0	10/370	4.30"	Ball	1/2"x6"
DD-045		208/230	2.3	10/370	4.30"	Sleeve	1/2"x6"
DD-036	1/2	115	7.6	10/370	4.85"	Ball	1/2"x6"
DD-046		208/230	3.8	10/370	4.85"	Sleeve	1/2"x6"

Capacitor Not Included

Cross Reference

Rotom	AO Smith	Fasco	GE	Marathon	UE	Rotom
DD-034	FML1026	D1730	3783	X034	752	R42034, R42419
DD-044	-	D1733	3784	-	-	R42449
DD-035	FML1036	D1731	3785	X035	753, 947	R42035, R42319
DD-045	FM1036	D1734	3786	-	-	R42349
DD-036	FML1056	D1732	3787	X036	754	R42036, R 42219
DD-046	FM1056	D1735	3788	-	-	R42249

Fan Coil Motors

ECM Fan Coil Motors

Features

- Drop-in replacement • Brushless DC • 3 Speeds • 5 1/8" Diameter • 54" lead length
- ECM with internal control • Long life ball bearings • Rotors are isolated from shaft to reduce motor vibration • Saves an average of 69% on energy usage • Runs cooler

Part #	HP	Volts	Rot	Amps	RPM Range	Shaft	Frame
M4-R2189	1/10	120	CWLE	1.6	3/1100,900,700	9.3" x 1/2" x 9.3"	5.0"



PSC Fan Coil Motors

Features

- Type: PSC • Double Shaft • Volts: 115/60 Hz • Enclosure: Open end-bells • Thermally Protected
- Capacitor Included • Ball Bearing • Insulation Class B • Protection Class IP20 • Base Mount Included


Part #	HP	Volts	Amps	Spd/RPM	Dia	Rot	Type	Cap	Shaft
EC-FC-1893	1/15	115	0.96	6/1550	4.8"	CW	PSC	6.3/450	1/2" x 7.26"
EC-FC-1895	1/4	115	3.80	6/1550	4.8"	CW	PSC	18/450	1/2" x 7.26"



Tempspec Replacement Fan Coil Motors

Replaces: UE & Tempspec DE3E142N

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rot.	Body	Frame	Bearing	Shaft
M4-R2197	1/14	115	1.25	PSC	7.5/370	3/820	CCW	3.22"	5.0"	Sleeve	3.4"x1/2"
M4-R2198	1/14	115	1.25	PSC	7.5/370	3/820	CCW	3.22"	5.0"	Sleeve	3.4"x1/2"



9" or 10" Bolt Circle

Part #	HP	Volts	Amps	Type	Cap.	RPM	Rot.	Body	Frame	Bearing	Shaft	Cross
M4-R2194	1/14	115	1.25	PSC	7.5/370	3/820	CCW	3.5"	5.0"	Sleeve	3.4"x1/2"	DE3E141N
M4-R2195	1/12	115	2.10	PSC	7.5/370	3/740	CCW	3.75"	5.0"	Sleeve	3.4"x1/2"	DE3F056N
M4-R799	1/8	115	3.00	PSC	5/370	5/1000	CCW	3.87"	5.0"	Ball	5.0"x1/2"	L350,L450,L600, UE DA3E200, DA3F100, DA3G142




Fan Coil Motors

Heating & Air Conditioning • High Rise Apartment • Condominium • Hotel
ONE MOTOR DOES ALL THREE! Bedroom, Living Room, Common Area.

DD-030 Replaces : 5KCP39DGV279S

Part #	HP	Amps	Cap.	RPM	Body	Frame	Shaft
DD-030	1/6	2.6	Inc.	5/950	3.98"	48	1/2"x4.5"

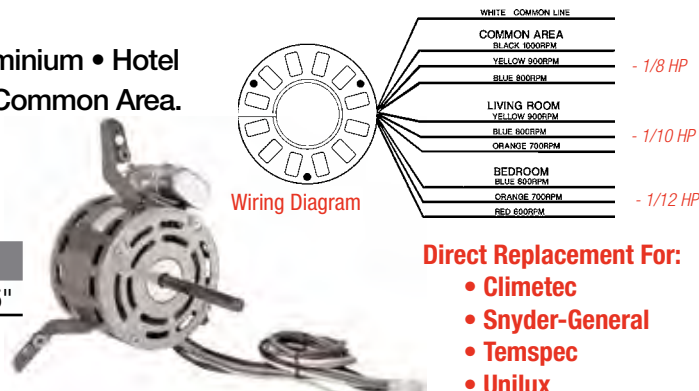

Fan Coil Blowers

Heating & Air Conditioning • High Rise Apartment • Condominium • Hotel

Part #	CFM	"A" Dim.
66-RFC300	300	6.75"
66-RFC400	400	8.25"
66-RFC600	600	9.00"

Applications


- Heating & Air Conditioning
- High Rise Apartment
- Condominium
- Hotel



Motors Sold Separately

Features

- 48 Frame
- 5.5" Diameter
- Open Drip Proof
- Resilient Ring & Base Included
- 60 Hz
- Sleeve Bearing
- Shaft: 1/2" x 1.5" W/ Flat
- Reversible
- Split Phase
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected



BF-4701
Illustrated

Belted Fan

Part #	HP	Volts	Amps	S.F.	RPM	Rot.	A Dim.	Bearing	Shaft
BF-4701	1/4	115	5.0	1.35	1/1725	Rev	6.25"	Sleeve	1/2" x 1.5"
BF-4706	1/3	115	6.8	1.35	1/1725	Rev	6.25"	Sleeve	1/2" x 1.5"
BF-4708	1/2	115	8.0	1.25	1/1725	Rev	6.75"	Sleeve	1/2" x 1.5"

Cross Reference

Rotom	AO Smith	Emerson	Fasco	GE	Marathon	UE	Rotom
BF-4701	GF2024	840CV	D6002	4701, H701	D127, B206, B303	-	R840
BF-4706	GF2034	841CV	-	4706, H711	D143, B207	-	R841
BF-4708	GF2054	1542C	-	4708	D162, B208	-	R1542

Condenser Fan Motors

5.5" Diameter Fan Canopy Motors

Replacement For:

Addison, Bohn, Comfortaire,


Carrier, Keeprite, York

- Reversible • 48 Frame
- Auto Protection • Shaft 4 5/8" x 1/2"
- High Thrust Capacity • Heavy Duty
- 60°C or 70°C Ambient
- Ball Bearing

Frame
Adapter

92-A4856

Converts 48 Frame
Motors to 56 Frame Motors



M5-S1512 Illustrated



Part #	HP	RPM	Volts	Amps 230	Amps 460	Amps 575	AMB	Shaft	Cap
Single Phase									
M5-S1502	1/3	1/1075	200/230/460	3.20	1.60		70°C	3.6" x 1/2"	5/440
M5-S1504		1/1075	200/230/460	4.00	2.00		70°C	3.6" x 1/2"	7.5/440
M5-S1503	1/2	1/1075	200/230/460	4.00	2.00		70°C	3.6" x 1/2"	7.5/440
M5-S1508		1/1075	575			1.50	60°C	3.6" x 1/2"	7.5/440
M5-S1510		1/1075	200/230/460	4.60	2.30		70°C	3.6" x 1/2"	20/370
M5-S1512	3/4	1/1075	200/230/460	4.60	2.30		70°C	3.5" x 5/8"	20/370
M5-S1514*		1/1075	200/230/460	6.40	3.20		70°C	4.0" x 5/8"	25/370
M5-S1516*	1	1/1075	575			2.20	60°C	4.0" x 5/8"	25/370
M5-S1518*	1 1/2	1/1075	200/230/460	7.00	3.50		70°C	4.0" x 5/8"	25/370
Three Phase									
M5-T1532	1/2	1/1140	200/230/460	3.00	1.50		70°C	3.5" x 1/2"	-
M5-T1534		1/1140	200/230/460	4.00	2.00		70°C	4.0" x 5/8"	-
M5-T1536	3/4	1/1140	575			1.50	60°C	4.0" x 5/8"	-
M5-T1538*		1/1140	200/230/460	5.60	2.80		70°C	4.0" x 5/8"	-
M5-T1539	1	1/1140	575			1.30	40°C	4.0" x 5/8"	-
M5-T1540*		1/1140	575	2.30		2.30	60°C	4.0" x 5/8"	-
M5-T1542*	1 1/2	1/1120	200/230/460	5.80	2.90		70°C	4.0" x 5/8"	-

* - Includes 92-A4856

Fan Canopy Condenser Fan - Replacements For: Carrier

5.5" Diameter • Single Phase • Lug Mounting • Semi Enclosed • Reversible

Ball Bearing • Auto Protection • 60°C Ambient • 2.5" x 1/2" Shaft

Part #	HP	RPM	Volts	Amps	Cross Ref
M5-S1507A	1/2	1/1075	200/230/460	4.6/2.3	HC43VL460/600
M5-S1506A	1/2	1/1075	575	1.80	HC43VE575



M5-S1507
Illustrated

6.5" Diameter • Single Phase • 56 Frame • CCW Rotation • Open Drip

Ball Bearing • Auto Protection • PSC • 3.6" x 5/8" Shaft


Part #	HP	RPM	Volts	Amps	Cross Ref
M5-S1453	1	1/1075	200/230/460	6.5	HC5ITE200/230/460
M5-S1455	1	1/1075	575	2.10	HC5ITE575




M5-S1455
Illustrated

Three Phase • P56Z Frame • 208-230/460 & 575 Volt • 5/8" x 3 1/2" Shaft

Part #	HP	RPM	Volts	Amps	Cross Ref
UE-H978	SPL	1140	200/230/460/575	5.5/2.8-3.4	HD52AK652



- Auto Protector
- Service Factor 1.0
- Class B Moisture-Resistant Ins.
- Double Sealed Ball Bearing
- 60°C Ambient
- 60 Hz
- 1" (Min.) Extended Thru Bolts
- Quick-Connect Design

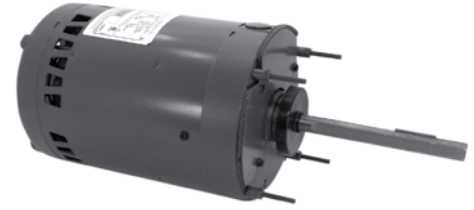

Single Phase

Part #	HP	Voltage	Amps	Cap.	RPM	Rot.	A Dim.	Bearing	Shaft	Base	Comment
M5-S1450	1/2	230	2.7	10/370	1/825	Rev	8.6"	Ball	6.1" x 5/8" Keyed & Flat	92-A8279	Trane, Carrier, Climatrol, York, X208
M5-S1452	3/4	460/200-230	1.9/4.0	10/370	1/1075	Rev	10.25"	Ball	6.0" x 5/8" Keyed & Flat	92-A8280	Trane, Carrier, Climatrol, York, X207
M5-S1454	1	460/200-230	2.4/4.8	25/370	1/1075	Rev	10.75"	Ball	6.0" x 5/8" Keyed & Flat	92-A8279	Trane, Carrier, Climatrol, York, C770
M5-S1451	1	575	2.2	25/370	1/1075	Rev	11.31"	Ball	6.0" x 5/8" Keyed & Flat	-	
M5-S1456	1 1/2	460/200-230	3.3/6.6	25/370	1/1075	Rev	12.06"	Ball	6.0" x 5/8" Keyed & Flat	-	Trane, Carrier, Climatrol, York, C771

- Auto Protector
- Class B Moisture-Resistant Insulation
- Double Sealed Ball Bearing
- Quick-Connect Design
- Service Factor 1.0
- 60°C Ambient
- 60 Hz



Three Phase

Part #	HP	Voltage	Amps	Encl.	RPM	Rot.	A Dim.	Bearing	Shaft	Base	Comment
M5-T2532	1/2	460/200-230	1.3/2.8-2.6	Open OSE	1/1140	Rev	10.31"	Ball	6.0" x 5/8" Keyed & Flat	92-A8280	Climate Master, Dunham Bush, X500
M5-T2533	1/2	575	1.0	-	1/1140	Rev	8.10"	Ball	5.0" x 5/8" Keyed & Flat	92-A8280	Climate Master, Dunham Bush, SPL
M5-T2529	1/2	575	0.8	TEAO	1/1140	Rev	9.12"	Ball	3.44" x 5/8" Keyed & Flat	-	H977
M5-T2534	3/4	460/200-230	1.5/2.8-3.0	Open OSE	1/1140	Rev	10.31"	Ball	6.0" x 5/8" Keyed & Flat	92-A8279	Keeprite, York, Trane, Carrier, Lennox, H567
M5-T2535	3/4	575	1.25	Open OSE	1/1140	Rev	10.31"	Ball	6.0" x 5/8" Keyed & Flat	Rigid	
M5-T2537	1	460/200-230	2.0/4.4-4.0	Open OSE	1/850	Rev	9.36"	Ball	4.88" x 5/8" Keyed & Flat	92-A8281	Blanchard Ness, Hussmann, SPL
M5-T2539	1	575	1.6	Open OSE	1/850	Rev	10.25"	Ball	3.31" x 5/8" Keyed & Flat	-	Blanchard Ness, Hussmann, H962
M5-T2538	1	460/200-230	2.6/5.3-5.2	Open OSE	1/1140	Rev	10.81"	Ball	6.0" x 5/8" Keyed & Flat	92-A8283	Keeprite, York, Trane, Carrier, Lennox, H667
M5-T2540	1	575	2.0	Open OSE	1/1140	Rev	10.81"	Ball	6.0" x 5/8" Keyed & Flat	92-A8283	Keeprite, York, Trane, Carrier, Lennox, X522
M5-T2542	1 1/2	460/200-230	3.0/5.8-6.0	Open OSE	1/1140	Rev	10.81"	Ball	6.0" x 5/8" Keyed & Flat	92-A8282	Keeprite, York, Trane, Carrier, Lennox, H767
M5-T2543	1 1/2	575	2.3	Open OSE	1/1140	Rev	10.81"	Ball	6.0" x 5/8" Keyed & Flat	92-A8282	Keeprite, York, Trane, Carrier, Lennox, H963
M5-T2544	2	460/208-230	7.2	-	1/1140	Rev	11.1"	Ball	5.0" x 5/8" Keyed & Flat	-	Cancoil, X509
M5-T2545	2	460/208-230	3.1/6.8-6.2	Open OSE	1/1140	Rev	12.00"	Ball	3.63" x 5/8" Keyed & Flat	-	70°C Ambient
M5-T2536	2	575	2.7	-	1/1140	Rev	11.1"	Ball	5.0" x 5/8" Keyed & Flat	-	Cancoil, X526

6.5" Three Phase Motors

ODP Resilient Base

Features

- Ball Bearing
- 40°C Ambient
- Class B Insulation
- 60 HZ
- Continuous Duty
- 1/4 thru 3 HP
- Open Drip Proof



Three Phase

Part #	HP	Voltage	Amps	SF	RPM	Rot. A	Dim.	Bearing	Shaft	Comment
M5-T2110	1/2	460/200-230	1.5/2.5-3.0	1.25	1/1725	Rev	12.2"	Ball	1.875" x 5/8" Keyed	YORK 24-15447-004, R1433A424
M5-T2113	1/2	575	0.70	1.25	1/1725	Rev	11.1"	Ball	1.875" x 5/8" Keyed	
M5-T2118	3/4	460/200-230	1.7/2.9-3.4	1.25	1/1725	Rev	12.2"	Ball	1.875" x 5/8" Keyed	BALDOR M3112A, FASCO D5626, MARATHON G101, CENTURY H851
M5-T2121	3/4	575	0.90	1.25	1/1725	Rev	11.1"	Ball	1.875" x 5/8" Keyed	MARATHON G962
M5-T2130	1	460/200-230	1.9/3.5-3.8	1.15	1/1725	Rev	12.7"	Ball	1.875" x 5/8" Keyed	MARATHON G100
M5-T2135	1	575	1.5	1.15	1/1725	Rev	12.7"	Ball	1.875" x 5/8" Keyed	YORK 24-13763-000, BLANCHARD E3016, R1453P323
M5-T2142	1 1/2	460/200-230	2.3/4.7-4.6	1.30	1/3450	Rev	12.9"	Ball	1.875" x 5/8" Keyed	HC54AE652, HC54DL651,653, P261-7501, R1463A244
M5-T2137	1 1/2	575	1.8	1.15	1/3450	Rev	12.9"	Ball	1.875" x 5/8" Keyed	
M5-T2140	1 1/2	460/200-230	2.8/5.0-5.6	1.15	1/1725	Rev	12.9"	Ball	1.875" x 5/8" Keyed	BALDOR RM3154A, FASCO D5630, MARATHON G126, CENTURY H853
M5-T2143	1 1/2	575	2.0	1.20	1/1725	Rev	11.1"	Ball	1.875" x 5/8" Keyed	
M5-T2156	2	460/200-230	2.9/6.0-5.8	1.20	1/3450	Rev	13.9"	Ball	1.875" x 5/8" Keyed	CARRIER HD56AE700, HD56DZ851, YORK 24-17671-003, R1473A244
M5-T2157	2	575	2.4	1.20	1/3450	Rev	13.9"	Ball	1.875" x 5/8" Keyed	YORK 24-10521-000, R1473P344
M5-T2158	2	460/200-230	3.5/6.6-7.0	1.15	1/1725	Rev	11.5"	Ball	2.3" x 7/8" Keyed	DUNHAM BUSH 0390080, R1473A243
M5-T2155	2	575	2.4	1.20	1/1725	Rev	13.1"	Ball	2.3" x 7/8" Keyed	
M5-T2164	3	460/200-230	4.3/9.0-8.6	1.15	1/3450	Rev	13.8"	Ball	2.3" x 7/8" Keyed	CARRIER HD58AE700, YORK 24-10341-000, R1483P244
M5-T2165	3	575	3.6	1.15	1/3450	Rev	13.8"	Ball	2.3" x 7/8" Keyed	YORK 24-10341-000, R1483P244, P56P2T11B2, R1483P344
M5-T2166	3	460/200-230	4.4/9.0-8.8	1.15	1/1725	Rev	12.20	Ball	2.3" x 7/8" Keyed	HD56DL206, HD58DL205,851, WW94X161, WW94X232, P-8-4347
M5-T2167	3	575	3.6	1.15	1/1725	Rev	14.6	Ball	2.3" x 7/8" Keyed	GENERAL REPLACEMENT



Air 2000

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Cross
R3-R316	1/20	115	1.36	SP	1550	CCW	2.7"	3.3"	Ball	-	1.6"×1/4"	80093

Nutech

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Cross
O1-R465	1/15	115	1.98	SP	3/1550	CW	4.0"	3.3"	Sleeve	-	2.3"×5/16"×2.3"	Electrohome 2868-513-133, 152, Nutech Lifebreath 23202
M4-R2655	1/12	115	1.10	PSC	1/1550	CCW	3.0"	5.0"	Sleeve	5/370	2.8"×3/8"×2.9"	AO812B2355 Fasco 7184-0254
M4-R2324	1/12	115	1.40	PSC	1/1550	CCW	3.6"	5.0"	Ball	3/370	2.8"×3/8"×2.6"	Nubreath 23-204, GE5KCP298G8560BS, Fasco 7185-0242

Vanee

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Cross
R3-R348	1/15	110/115	1.12	PSC	2/1550	CCW	4.1"	3.3"	Sleeve	4/370	3.35"×3/8"	Heat Recovery Motor M1703, Fasco 7190-0369

Venmar

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Cross
R2-R462	1/17	115	1.20	PSC	3/1660	CW	4.00"	3.3"	Sleeve	7.5/370	3.5"×3/8"×3.5"	02101, Fasco 7190-2271 Kit 12027, 12029, 12109
R2-R438	1/14	115	1.05	PSC	2/1600	CW	4.25"	3.3"	Sleeve	4/370	1.55"×5/16"	01038, Fasco 7190-2008
R3-R366	1/7	115	1.7	PSC	3/1630	CW	4.78"	3.3"	Sleeve	7.5/370	2.97"×3/8"×3"	02100, Fasco 7190-1523 Kit 1206, 12151
R2-R422	1/6	115	2.9	PSC	3/1690	CW	4.93"	3.3"	Sleeve	7.5/370	2.1"×3/8"	02209, Fasco 7190-1522



Addison

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body Dia	Bearing	Cap.	Shaft	Comments	
M2-R32727	1/5-1/8	230	1.5-0.8	PSC	2/1075	CCW	4.4"	5.5"	Sleeve	5/370	3.75"x1/2"	1847-01-05, 8101-193, 8101-279, 18471-01-05, 19906-01-02, F54CKY-1379, F55BWM-1119, F55CDR-1259, F55CSH-1352 K55EBC-2608, K55ERC-3004, 8537
M2-R32427	1	208/230 /460	6.2 /3.1	PSC	1/1075	CCW	6.2"	5.5"	Ball	15/370	3.5"x5/8"	811N-0064A, F48F07B65

Air 2000

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body Dia	Bearing	Cap	Shaft	Comments	
R3-R316	1/20	115	1.36	SP	1550	CCW	2.7"	3.3"	Ball	-	1.6"x1/4"	HRV Motor 80093

Airdex

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body Dia	Bearing	Cap	Shaft	Comments	
R7-RB245	1/25	115	1.5	SP	1550	CCW	9.2"	3.3"	Sleeve	-	2.8" Wheel	AMU245, Airdex

Amana

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R32118	1/12	208/230	0.6	PSC	1/825	CW	3.86"	5.5"	Sleeve	5/370	2.25"x1/2"	1871, K55BGZ-6813
M2-R31018	1/6	208/230	1.1	PSC	1/825	CW	4.36"	5.5"	Sleeve	5/370	2"x1/2"	1873, K55BGW-6814

American Air Filter

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap.	Shaft	Comments
M4-R2675	1/30	208/230	0.4	PSC	4/1075	CCW	3.8"	4.75"	Sleeve	2/370	7.7"×1/2"×7.7"	Singer, Climate Control 02024224
M4-R2622	1/6-1/12	115	3.70	PSC	4/1550	CCW	4.0"	5.0"	Sleeve	5/370	8.13"×1/2"×8.13"	7184-0354
M4-R2677	1/5-1/10	115	2.8	PSC	3/1625	CCW	3.55"	5.5"	Sleeve	5/370	8.55"×1/2"×8.5"	7124-0103



Arkla

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body Dia	Bearing	Cap	Shaft	Comments	
R6-R32317	1/3	115	4.8	PSC	1/825	CCW	5.43"	5.5"	Ball	5/370	2.5"×1/2"	B14506-393, B14506-363, F48SR8V1, F48SP8V3, K8042, 2342, C729, 3M824, D795
M2-R32237	1/2	230	3.0	PSC	1/825	CCW	5.38"	5.5"	Ball	5/370	2.75"×1/2"	B14506-396, B14506-354, F48SR8V3, F48SR8V7, F48ST8V1, K8075

Armstrong

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body Dia	Bearing	Cap	Shaft	Comments	
M4-R2691	1/5	208/230	1.5	PSC	1/1075	CW	4.00"	5.0"	Sleeve	5/370	3.9"×1/2"	Magic Chef, 35035B001 Johnson Air Ease 322P859, CJK15,18,24,30,36, F42B59A01

Arneg

Part #	Watts	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Shaft	Comments
EC-4W115V835	4	115	0.40	SP	1/1550	CW	2.30"	-	Sleeve	Hubless	34410000
EC-9W115V834	9	115	0.58	SP	1/1550	CW	2.67"	-	Sleeve	Hubless	34410001
EC-HE-0147	12	115	0.18	ECM	1/1450	CW	3.61"	-	Ball	Hubless	34410013 , 34410009, 24681010
EC-HE-0170	12	115	0.18	ECM	1/1450	CW	3.61"	-	Ball	Hubless	34410012 (for fan 34415010)

Blanchard-Ness (cont. next page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
R3-R326	1/110	120	0.40	SP	1/1550	CW	2.09"	3.3"	Sleeve	-	1.4"×1/4"	Blower Coil Motors, E01001,2,3
T1-R1014	1/100	115	0.70	SP	1/3000	CW	0.875	Skel	Sleeve	-	1.25"×0.1811"	Bohn, Hussman Evap. Motor E1014, J238-087-8104
R3-R302	1/100	240	0.30	SP	1/1550	CW	1.94"	3.3"	Sleeve	-	1.3"×1/4"	Blower Coil Motors, E01004
R3-R358	1/20	120	2.00	SP	1/1550	CCW	3.25"	3.3"	Sleeve	-	2.8"×5/16"	Blower Coil Motors, E01007,57,58
R3-R359	1/20	208/240	1.00	SP	1/1550	CCW	3.35"	3.3"	Sleeve	-	3.2"×5/16"	Blower Coil Motors, E01059
R3-R1052	1/20	120	2.00	SP	1/1550	CCW	3.10"	3.3"	Ball	-	3.2"×5/16"	Blower Coil Motors, E1052
R3-R1053	1/20	208/230	1.00	SP	1/1550	CCW	3.10"	3.3"	Ball	-	3.2"×5/16"	Blower Coil Motors, E1053



Blanchard-Ness (cont. from previous page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
R3-R313	1/15	120	2.20	SP	1/1550	CCW	3.60"	3.3"	Ball	-	3.0"x5/16"	Blanchard 5034LS, 5008SS, U-572
R3-R314	1/15	208/230	1.30	SP	1/1550	CCW	3.60"	3.3"	Sleeve	-	3.0"x5/16"	Blanchard 5044MS, 5008TS, U-573
M2-R22445	1/4	208/230	1.50	PSC	1/825	Rev	5.11"	5.5"	Sleeve	5/370	6" x 1/2"	E1026
M2-R22746	1/3	208/230	2.60	PSC	1/1075	Rev	4.80"	5.5"	Sleeve	7.5/370	6" x 1/2"	E1022, E1025
M2-R22745	1/2	208/230	4.40	PSC	1/1075	Rev	4.80"	5.5"	Sleeve	5/370	6" x 1/2"	E1064
M5-T2532	1/2	208/230/460	2.80	3 Ph	1/1140	Rev	10.3"	6.5"	Ball	-	6" x 5/8"	E01020, 1066
M5-T2533	1/2	575	1.00	3 Ph	1/1140	Rev	8.1"	6.5"	Ball	-	5" x 5/8"	E01021
M5-T2537	1	208/230/460	4.4	3 Ph	1/850	Rev	9.36"	6.5"	Ball	-	4.88" x 5/8"	E05026
M5-T2539	1	575	1.60	3 Ph	1/850	Rev	10.25"	6.5"	Ball	-	3.31" x 5/8"	E05027
M5-T2544	2	208/230/460	7.20	3 Ph	1/1140	Rev	11.1"	6.5"	Ball	-	5" x 5/8"	E05033
M5-T2536	2	575	2.70	3 Ph	1/1140	CW	11.1"	6.5"	Ball	-	5" x 5/8"	E05034

Bohn

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O6-R511	1/350	230	0.35	SP	1/1350	CW	1.7"	3.3"	Sleeve	-	2.0" x 1/4"	79105, 79115
R3-R326	1/110	120	0.40	SP	1/1550	CW	2.09"	3.3"	Sleeve	-	1.4" x 1/4"	79101
T1-R605	1/55	115	1.00	SP	1/2800	CW	0.90"	Skel	Sleeve	-	1.75" x 0.1811"	79103, 79104
R3-R130	1/45	230	0.80	SP	1/1550	CW	2.70"	3.3"	Sleeve	-	1.5" x 5/16"	79106, 79108, 79113, 5001M
R3-R318	1/25	115	1.50	SP	1/1550	CW	2.84"	3.3"	Sleeve	-	2.8" x 5/16"	79105, 5010S
R3-R358	1/20	115	2.00	SP	1/1550	CCW	3.25"	3.3"	Sleeve	-	2.8" x 5/16"	5001L, 8S, 4L
R3-R359	1/20	208/240	1.00	SP	1/1550	CCW	3.35"	3.3"	Sleeve	-	3.2" x 5/16"	5008T, 5034M
R3-R313	1/15	120	2.20	SP	1/1550	CCW	3.60"	3.3"	Ball	-	3.0" x 5/16"	5034LS, 5008SS, U-572
R3-R314	1/15	208/230	1.30	SP	1/1550	CCW	3.60"	3.3"	Sleeve	-	3.0" x 5/16"	5044MS, 5008TS, U-573



US-R90573



US-R90572



US-R90721



M5-S1502



M5-S1504



M5-T1532



M5-T2537



M5-T2539

Bohn (cont. from previous page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
US-R90573	1/15	208/230	1.20	SP	1/1550	CCW	3.50"	3.3"	Sleeve	-	3.14"×5/16"	5KSM59LS2262AS, 5034MS, 5008TS
US-R90572	1/15	115	1.80	SP	1/1550	CCW	3.00"	3.3"	Sleeve	-	3.03"×5/16"	5KSM59JSK143S, 5KSM59JS5036S, 5034LS, 5008SS
US-R90721	1/12	115/208/230	1.1/6	PSC	1/1550	Rev	3.59"	3.3"	Ball	4/370	3.15"×5/16"	25308601, 25309101, 25311194, 25311195
M5-S1502	1/3	200/230/460	3.2/1.6	PSC	1/1075	Rev	7.30"	5.5"	Ball	5/440	3.5" × 1/2"	5015H
M5-S1504	1/2	200/230/460	4.00	PSC	1/1075	Rev	12.2"	5.5"	Ball	7.5/440	3.5" × 1/2"	5002P, 5003P
M5-T1532	1/2	200/230/460	1.50	3 Ph	1/1140	Rev	9.2"	5.5"	Ball	-	3.5" × 1/2"	5006T
M5-T2537	1	208/230/460	4.40	3 Ph	1/850	Rev	9.36"	6.5"	Ball	-	4.88" × 5/8"	E5028
M5-T2539	1	575	1.60	3 Ph	1/850	Rev	10.25"	6.5"	Ball	-	3.31" × 5/8"	E5027



Carrier (cont. next page...)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
UE-580	1/20	115	1.8	SP	1/3300	CCW	3.75"	3.3"	Sleeve	-	2.12" x 5/16"	JA1P053
UE-570	1/20	115/230	1.8/.92	SP	1/3000	CCW	6"	3.3"	Ball	-	2.5" x 1/4"	HC24AU600, HC24AU701
UE-9625	1/16	460	0.25	PSC	1/3450	CW	4.87"	3.3"	Ball	4/370	3.25" x 5/16"	HC30GB460, HC30GB462 JF1H101, JF1H091, D1184
UE-9626	1/16	208/230	0.48	PSC	1/3450	CW	4.87"	3.3"	Ball	4/370	3.25" x 5/16"	HC30GB230, HC30GB232 JF1H012, JF1H092, D1182
M2-R33401	1/12	208/230	0.53	PSC	1/1100	CW	3.62"	5.5"	Sleeve	5/370	2.18" x 1/2"	3401, HE39GE232
M2-R33402	1/10	208/230	0.7	PSC	1/1100	CW	3.5"	5.5"	Sleeve	5/370	2.18" x 1/2"	3402, HC39GE233
UE-170B	1/6, 1/10, 1/15	208/230	1.1	PSC	3/1625	CCW	3.75"	5.5"	Sleeve	5/370	8.5" x 1/2" x 8.5"	5KCP39CGA401T
UE-513A	1/6, 1/8, 1/10	208/230	1.3	PSC	3/1040	CW	3.8"	5.5"	Sleeve	3/370	7" x 1/2" x 2.18"	124279, 128560
M2-R31014	1/6	208/230	0.9	PSC	1/1500	CCW	3.62"	5.5"	Sleeve	5/370	2.18" x 1/2"	OCA1014
M2-R35453	1/6	208/230	.80/.95	PSC	1/1075	CCW	3.62"	5.5"	Sleeve	3/370	3.62" x 1/2"	5453, K55JGH-2667
UE-9650	1/6	208/230	1.2	PSC	2/1075	CCW	3.62"	5.5"	Sleeve	4/370	3.18" x 1/2"	9650
M2-R22152	1/5-1/6	208/230	1.30	PSC	2/1050	Rev	3.40"	5.5"	Sleeve	5/440	4.0" x 1/2"	HC37VE230, 600
M4-R2387	1/5	115	7.8	SP	4/1050	CCW	4.1"	5.0"	Sleeve	-	4.81" x 1/2"	OCB6427
M4-R2981	1/5	115	9.8	SP	4/1050	CCW	4.0"	5.0"	Sleeve	-	4" x 1/2"	2981
M2-R33400	1/5	208/230	1, 1.1	PSC	1/825	CW	4.25"	5.5"	Sleeve	7.5/370	2.12" x 1/2"	3400, HC37GE208



M2-R22844



M2-R22000



M2-R42440



R6-R42540



R6-R42526



R6-R43404



M2-R22012



M2-R22011



M2-R32036



M2-R22036



R6-R48008



R6-R42415



M2-R35301



M1-R63116



M2-R22017

Carrier (cont from previous page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R22844	1/4	230	1.4	PSC	1/1625	CCW	3.87"	5.5"	Sleeve	4/370	4" x 1/2"	D844, 3064, 5KCP39BG7524S 5KCP39BGK007T
M2-R22000	1/4	230	2.1	PSC	1/1075	CCW	3.75"	5.5"	Sleeve	5/370	3.25" x 1/2"	F48SF6MA5, F48SJ6M5, 3158 F48SG6MA10
M2-R42440	1/4	208/230	2.2	PSC	2/1075	Rev	3.75"	5.5"	Sleeve	5/370	4.31" x 1/2"	F48SJ6MA, D843, 3303 F48SG6MA16
R6-R42540	1/4	208/230	2.1	PSC	1/1075	CCW	4.12"	5.5"	Sleeve	5/370	3.25" x 1/2"	OCT1026S
R6-R42526	1/4	230	1.6	PSC	2/1075	Rev	4.37"	5.5"	Sleeve	5/370	5.5" x 1/2"	K8009
R6-R43404	1/4	208/230	1.3,1.5	PSC	1/1100	CW	4.12"	5.5"	Sleeve	5/370	2.12" x 1/2"	3404
M2-R22012	1/3-1/4	208/230	2.50	PSC	2/1075	Rev	4.00"	5.5"	Sleeve	5/370	4.0" x 1/2"	HC41VE700, 701
M2-R22011	1/3	208/230	2.5	PSC	2/1075	Rev	4.62"	5.5"	Ball	5/370	4.24" x 1/2"	OCA1036
M2-R32036	1/3	208/230	2.5	PSC	2/1075	CCW	4.25"	5.5"	Sleeve	5/370	3.5" x 1/2"	OCF1036
M2-R22036	1/3	208/230	2.9	PSC	1/1075	CCW	4.25"	5.5"	Sleeve	5/370	3.5" x 1/2"	OCE1036
R6-R48008	1/3	230	1.8	PSC	2/1075	Rev	4.37"	5.5"	Sleeve	5/370	5.5" x 1/2"	K8008
R6-R42415	1/3	115	5.7	PSC	4/1050	CCW	5.37"	5.5"	Sleeve	Internal	4.62" x 1/2"	OCB4036SP
M2-R35301	1/3	208/230	2.8	PSC	2/1075	CW	4.0"	5.5"	Sleeve	5/370	3.37" x 1/2"	3123, D845, 5KCP39HGA206T, 5KCP39HG7611S, P251- 5301, PS2126-2
M1-R63116	1/2	115	7.5	PSC	4/1075	CCW	5.12"	5.5"	Sleeve	7.5/370	7.75" x 1/2" x 4.36"	HC43SZ116
M2-R22017	1/2	208/230	4.0	PSC	1/1075	CCW	7.37"	5.5"	Ball	7.5/370	4.37" x 1/2"	F48J6A1, F48J6A2, F48J6A5 P107, 3132, 5KCP37PG361S



Carrier (cont. from previous page...)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M5-S1507A	1/2	208/230 460	4.6/2.3	PSC	1/1075	Rev	6.37"	5.5"	Ball	7.5/440	1.56" x 1/2"	OCA1056
M5-S1506A	1/2	575	1.8	PSC	1/1075	CCW	5.62"	5.5"	Ball	7.5/440	1.56" x 1/2"	5OCA1056
M1-R52294	1/2	208/230	3.0	PSC	3/1075	CCW	5.0"	5.5"	Sleeve	7.5/370	2.75" x 1/2" x 7.5"	OCB1056
R6-R42575	1/2	575	1.0	3 PH	1/1140	Rev	7.0"	5.5"	Ball	-	2.5" x 1/2"	P48J6A2, HD44ML461
R6-R42652	3/4	208/230 460	2.5/ 1.25	3 PH	1/1725	Rev	10.0"	5.5"	Ball	-	1.93" x 5/8"	HD54KF652, HD46GA800
R6-R46230	3/4	208/230	3.8	3 PH	1/1140	Rev	8.75"	5.5"	Ball	-	3.0" x 1/2"	HD46GL230
R6-R46460	3/4	460	1.9	3 PH	1/1140	Rev	8.75"	5.5"	Ball	-	3.0" x 1/2"	HD46GK460
M2-R32050	3/4	575	1.65	PSC	3/1025	Rev	6.50"	5.5"	Ball	15/370	4.0" x 1/2"	Rooftop Evap. Motor
M2-R32051	3/4	460	2.15	PSC	3/1075	Rev	6.63"	5.5"	Ball	15/370	4.0" x 1/2"	ThermoPlus HC45AL460
R6-R46651	SPL	208/230 460	3.6/1.8	3 PH	1/1725	Rev	9.87"	6.5"	Ball	-	2.0" x 1/2"	HD56FK651, P56A01A02
UE-H978	SPL	208/230 460/575	5.5/2.8 3.4	3 PH	1/1140	Rev	11.37"	6.5"	Ball	-	3.6" x 5/8"	HD52AK652, MAG. 176055
M5-S1453	1	200/230 460	6.5	PSC	1/1075	CCW	10.20"	6.5"	Ball	30/370	3.6" x 5/8"	HC5ITE200/230/430
M5-S1455	1	575	2.10	PSC	1/1075	CCW	10.20"	6.5"	Ball	30/370	3.6" x 5/8"	HC5ITE575
UE-H980	3	208/230 460	10.6/ 4.8	3 Ph	1/1725	Rev	14.94"	6.5"	Ball	-	7/8" x 2 5/16"	HD60FK651, MAG. 176500
UE-H979	5	208/230 460	15/7.4	3 Ph	1/1725	Rev	15.93"	6.5"	Ball	-	7/8" x 2 5/16"	HD60FK652, MAG. 182779



Chromalox

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M4-R2639	1/20	208/240	0.42	PSC	2/1075	CW	3.34"	5.0"	Sleeve	3/370	1.95"×1/2"	01103-100, UE CE3E001N
M4-R2928	1/12	208/230	0.60	PSC	1/1000	CCW	3.09"	5.0"	Sleeve	3/370	2.45"×1/2"	01103-202, UE DE3D427N
M3-R2671	1/10	208/240	0.6	PSC	3/1610	CCW	3.09"	5.0"	Sleeve	3/370	8.6"×1/2"×8.6"	807-101, DE2E106N
M4-R2929	3/16	208/230	1.30	PSC	1/1050	CW	3.34"	5.0"	Sleeve	4/370	2.45"×1/2"	01103-201, UE DE3E102N
M1-R52170	1/4	208/230	2.1	SP	1/1725	Rev	7.0"	5.5"	Sleeve	-	5.5"×1/2"×5.5"	07589, GE 7J399GX, Marathon 48S17D1240

Climate Master

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M5-T2541	1	575	1.70	3 Ph	1/1140	CW	8.22"	6.5"	Ball	-	5.0"×5/8"	GE 5J999GBX, Marathon 56T105308

Coldstream

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R1-R128	1/135	115	0.35	SP	1/1550	CW	2.09"	3.3"	Sleeve	-	0.6" Hub-less	2868-505-023, 2868-505-072
O6-R230	1/70	115	0.64	SP	1/2800	CCW	2.30"	3.3"	Sleeve	-	1.3" × 1/4"	2862-405-003, 2862-405-010
R1-R122	1/60	230	0.35	SP	1/1550	CW	2.50"	3.3"	Sleeve	-	0.6" Hub-less	SM122
R1-R121	1/60	230	0.35	SP	1/1550	CCW	2.50"	3.3"	Sleeve	-	0.6" Hub-less	76121, D430, 64
R1-R137	1/60	115	0.59	SP	1/1550	CW	2.20"	3.3"	Sleeve	-	0.6" Hub-less	76051
R7-RB323	1/20	115	0.65	SP	1/1640	CCW	17.5"	Skel	Sleeve	-	-	Coca-Cola 359323, 512082



Comfort Air

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R32050	3/4	575	1.65	PSC	3/1025	Rev	6.50"	5.5"	Ball	15/370	4.0" x 1/2"	Commercial Rooftop
M2-R32051	3/4	460	2.15	PSC	3/1075	Rev	6.65"	5.5"	Ball	15/370	4.0" x 1/2"	43G52

Copeland (cont. next page...)

Part #	Watts	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O4-R5911	5	115	0.35	SP	1/1550	CW	2.58"	3.5"	Unit	-	Threaded	COPELAND 050-0010-00,0178-00 050-0246-01,HILL PP7577
O4-R5311	6	120	0.36	SP	1/1550	CW	2.8"	3.5"	Unit	-	Threaded	GE5311
O4-R5421	9	208/230	0.29	SP	1/1550	CW	2.8"	3.5"	Unit	-	Threaded	GE5421
O4-R5411	9	120	0.58	SP	1/1550	CW	2.8"	3.5"	Unit	-	Threaded	GE5411
O4-R3531	35	115	1.40	SP	1/1500	CW	3.6"	3.8"	Unit	-	Hubless	050-0367-03, 050-0367-06, 050-0367-10
O4-R3532	35	208/230	0.70	SP	1/1500	CW	3.6"	3.8"	Unit	-	Hubless	050-0367-01, 050-0367-08, 050-0367-11
O4-R3512	35	208/230	0.70	SP	1/1550	CW	3.5"	3.8"	Unit	-	Threaded	050-0227-02
O4-R3511	35	120	1.40	SP	1/1550	CW	3.5"	3.8"	Unit	-	Threaded	050-0227-01
O4-R5011	50	115	1.70	SP	1/1500	CW	4.5"	3.8"	Unit	-	1.5"x3/8"	050-0011-01, 0017-02, 050-0237-01
O4-R5012	50	208/230	0.85	SP	1/1550	CW	4.5"	3.8"	Unit	-	1.5"x3/8"	050-0017-01
O4-R5022	50	208/230	0.85	SP	1/1550	CCW	4.5"	3.8"	Unit	-	1.5"x3/8"	050-0011-00
O4-R5031	50	115	1.70	SP	1/1500	CW	4.5"	3.8"	Unit	-	Hubless	050-03440-01
O4-R5032	50	208/230	0.85	SP	1/1500	CW	4.5"	3.8"	Unit	-	Hubless	050-03440-00, 050-03440-10
O4-R5460	50	460	0.44	SP	1/1500	CW	4.5"	3.8"	Unit	-	Hubless	050-03440-03



UE-174A



R4-R6128



R4-R3047



R4-R6129



R4-R3124



M5-S1502



M5-T1536



O4-R6247



T1-R621

Copeland(cont. from previous page...)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
UE-174A	1/6	208/230	1.0	PSC	1/1625	Rev	4.0"	5.5"	Sleeve	5/370	2.5" x 1/2"	S3051
R4-R6128	1/6	230	1.5	PSC	1/1625	CW	3.87"	5.0"	Sleeve	5/370	2.5" x 1/2"	322P913, 050-0251-00, 128
R4-R3047	1/4	208/230	1.5	PSC	1/1625	CW	4.56"	5.5"	Sleeve	5/370	3.0" x 1/2"	3047, D783, K6124, 5KCP39GGD320T, 5KCP39GG3537S
R4-R6129	1/4	230	1.5	PSC	1/1625	CW	3.87"	5.0"	Sleeve	5/370	2.5" x 1/2"	322P914, 050-0250-00, 6129
R4-R3124	1/3	208/230	2.6	PSC	1/1625	CW	5.75"	5.5"	Ball	4/370	2.25" x 1/2"	5KCP39KGB906AT, 5KCP39KGB906AS, 5KCP32KG259S, 050-0108-00, 050-0018-00, K55ECE2645, K55HXJNJ-2976, K55HXSZJ-8106, 3124, 6127, 5KCP32KG175S
M5-S1502	1/3	200/230/460	3.2/1.6	PSC	1/1075	Rev	7.3"	5.5"	Ball	5/440	3.5" x 1/2"	050-0015-00, 0105-00
M5-T1536	3/4	575	1.50	3 Ph.	1/1140	Rev	11.0"	5.5"	Ball	-	4.0" x 5/8"	050-0169-00, 01, 0236-00

Cornelius / QBD

Part #	HP/W	Volts	Amps	Type	RPM	Rot.	Stack	Frame	Bearing	Cap	Shaft	Comments
O4-R6247	5W	115	0.35	SP	1/1550	CW	2.58"	3.5"	Unit	-	Threaded	R CORNELIUS
T1-R621	1/187	115	0.40	SP	1/3000	CW	0.55"	5.5"	Sleeve	-	1.29"x0.1811"	QBD 47-0410-001, -022, -015, IN DC5 & DC7



Dundas Greenhouse

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R7-RB141	1/30	115	1.1	SP	1/2860	CCW	5.5"	3.3"	Sleeve	-	-	Dundas Foundry Cooler Blower Fan D500, UE9492

Dunham Bush

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R1-R124	1/20	120	1.60	SP	1/1550	CCW	2.7"	3.3"	Ball	-	0.90" Hubless	350044, 46, MM2847
R1-R125	1/20	230	0.75	SP	1/1550	CCW	2.7"	3.3"	Ball	-	0.90" Hubless	350043, 45, MM2848
R6-R42811	1/8	120	2.70	PSC	1/1050	CCW	4.0"	5.5"	Sleeve	Inc	4.8" x 1/2"	350014, 16, E310025
M5-S1510	3/4	200/230/460	2.30	PSC	1/1075	Rev	12.2"	5.5"	Ball	20/370	3.6" x 1/2"	371027
M5-T1540	1	575	2.30	3 Ph	1/1140	Rev	11.5"	5.5"	Ball	-	4.0" x 5/8"	371025, T1538
M5-T2158	2	208/230/460	7.00	3 Ph	1/1725	Rev	11.5"	6.5"	Ball	-	2.3" x 7/8"	390080
M5-T2166	2	208/230/460	8.40	3 Ph	1/1725	Rev	12.2"	6.5"	Ball	-	2.3" x 7/8"	390082, 87, 88

Emerson (Quiet Kool)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M4-R742	1/10	115	1.35	PSC	3/1080	CCW	3.37"	5.0"	Sleeve	4/370	3.5" x 1/2" x 4"	OEK6511
M4-R743	1/5	208/230	1.60	PSC	3/1400	CCW	3.8"	5.0"	Sleeve	5/370	3.5" x 1/2" x 4"	OEK4510
M4-R2630	1/3	208/230	2.40	PSC	1/1400	CW	4.12"	5.0"	Sleeve	6/370	5.0" x 1/2"	M15010



Fedders

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M4-R2580	1/6	115	2.0	PSC	3/1625	CCW	3.62"	5.0"	Sleeve	10/370	3.6"×1/2"×6.8"	M15580-3
M4-R740	1/6	230	2.2	SP	2/1050	CCW	3.12"	5.0"	Sleeve	-	2.8"×1/2"×4"	S196-00161-003, S196-00161-016
M2-R22180	1/5	230	1.3	PSC	1/1080	CCW	3.87"	5.5"	Sleeve	7.5/370	4.25" × 1/2"	S196-179-1, S196-HP127-1, S196-KP127-1, S196-66-1, D882, 7126-0320
M4-R2339	1/5	208/230	1.5	PSC	2/1350	CCW	3.37"	5.0"	Sleeve	4/370	3.6"×1/2"×2.7"	S202-00028-00, 11-33-90000-003, F42B11A23,
M1-R52289	1/3	208/230	2.2	PSC	3/1400	CCW	4.87"	5.5"	Sleeve	7.5/370	3.2"×1/2"×6.5"	S202-00034-002 F48F32A23 11-28-90000-004

Foster

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R1-R120	1/85	120	0.45	SP	1/1550	CW	2.19"	3.3"	Sleeve	-	0.6" Hubless	76120, D425, SM120, 63
R1-R119	1/85	120	0.45	SP	1/1550	CCW	2.19"	3.3"	Sleeve	-	0.6" Hubless	61,62, D424, SM119
R1-R127	1/75	120	0.75	SP	1/1550	CCW	1.94"	3.3"	Sleeve	-	1.0" Hubless	2868-505-063
R1-R122	1/60	230	0.35	SP	1/1550	CW	2.19"	3.3"	Sleeve	-	0.6" Hubless	SM122
R1-R121	1/60	230	0.35	SP	1/1550	CCW	2.19"	3.3"	Sleeve	-	0.6" Hubless	76121, D430, 64
R1-R101	1/45	120	0.90	SP	1/1550	CW	2.19"	3.3"	Sleeve	-	0.7" Hubless	76101, SS101, D437, SM101
R1-R103	1/45	120	0.90	SP	1/1550	CCW	2.19"	3.3"	Sleeve	-	0.7" Hubless	76103, SS103, D436, SM103, SM104



Friedrich

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M1-R52639	1/6	230	0.8	PSC	5/1075	CCW	4.0"	5.5"	Sleeve	4/370	2.5"×1/2"×3.3"	D867, 323P225
M1-R62350	1/3	230	1.8	PSC	5/1075	CCW	4.87"	5.5"	Sleeve	5/370	2.5"×1/2"×2.6"	3002, 5KCP39MG9096S, 5KCP39MG9579S, 5KCP39MG71455, 5KC-P39LGG7205, K4340, D868

GE 11 Frame Replacements

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
US-R90671	1/15	115/208/230	2.1/1.1	SP	1/1550	CW	5.00	11	Ball	-	2.24"×5/16"	671, 81671
US-R90672	1/15	115/208/230	2.1/1.1	SP	1/1550	CCW	5.00	11	Ball	-	2.24"×5/16"	672, 81672

Goodman/Janitrol

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R32251	1/6	208/230	1.0	PSC	1/1075	CCW	3.87"	5.5"	Sleeve	5/370	3.75"×1/2"	B13400-251, 4M287, F48F96A76, F48A90A76, 3216
M2-R22247	1/4	208/230	1.5	PSC	1/1075	CCW	4.25"	5.5"	Sleeve	5/370	3.25"×1/2"	B13400-247, F48A91A76, 3218, F48F97A76

Habco

Part #	HP	Volts	Amps	Type	RPM	Rot.	Stack	Dia	Bearing	Cap	Shaft	Comments
T1-R606	1/134	115	0.50	SP	1/3000	CCW	0.65"	Skel	Sleeve	-	1.10"×7/32"	H.A. Brown C021795
T1-R607	1/49	115	1.3	SP	1/2300	CCW	1.16"	Skel	Sleeve	-	1.75"×7/32"	H.A. Brown C021617, Bomax 301-6966



Heatcraft

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body Dia	Bearing	Cap	Shaft	Comments	
US-R90574	1/20	115	1.90	SP	1/1550	CW	2.75"	3.3"	Sleeve	-	2.48"x5/16"	7136-2113, 253-1194
US-R90575	1/20	230	0.89	SP	1/1550	CW	2.75"	3.3"	Sleeve	-	2.48"x5/16"	7136-3371, 253-1195
US-R90573	1/15	208/230	1.20	SP	1/1550	CCW	3.50"	3.3"	Sleeve	-	3.14"x5/16"	5KSM59LS2262AS, 5034MS, 5008TS
US-R90572	1/15	115	1.80	SP	1/1550	CCW	3.00"	3.3"	Sleeve	-	3.03"x5/16"	5KSM59JSK143S, 5KSM59JS5036S, 5034LS, 5008SS
M4-R2155	1/15,1/20,1/25	120	1.20	ECM	1/1625	CCW	2.85	5.0"	Ball	-	3.0"x5/16"	22617801, 22618001, 25307801, 25308001
M4-R2156	1/15,1/20,1/25	120	1.20	ECM	1/1625	CW	2.85	5.0"	Ball	-	3.0"x5/16"	2531194
M4-R2157	1/15,1/20,1/25	230	0.70	ECM	1/1625	CCW	2.85	5.0"	Ball	-	3.0"x5/16"	22617701, 22617901, 25307701, 25307901
M4-R2158	1/15,1/20,1/25	230	0.70	ECM	1/1625	CW	2.85	5.0"	Ball	-	3.0"x5/16"	2531195
US-R90721	1/12	115/ 208/230	1.1/6	PSC	1/1550	REV	3.59"	3.3"	Ball	4/370	3.15"x5/16"	25308601, 25309101, 2531194, 2531195

Hill

Part #	HP/W	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R1-R129	1/55	115	0.70	SP	1/3000	CCW	2.41"	3.3"	Sleeve	-	0.5" Hubless	PP32032E
R4-R3001	1/3	208/230	1.80	PSC	1/1625	CW	4.50"	5.5"	Sleeve	-	3.5" x 1/2"	GE3001, PP3955B
R4-R3067	1	208/230	7.10	PSC	1/1075	Rev	9.20"	5.5"	Ball	15/370	3.8" x 1/2"	GE3067, PP19162G
O4-R5911	6 W	115	0.40	SP	1/1550	CW	3.40"	3.5"	Unit	-	Threaded	PP7577M
O4-R5411	9 W	115	0.58	SP	1/1550	CW	2.80"	3.5"	Unit	-	Threaded	GE5411
EC-HE-0182	10W	115	0.19	ECM	1/1550	CW	3.61"	-	Ball	-	Hubless	P079441C, P066237A
EC-HE-0176	15W	115	0.22	ECM	1/1600	CW	4.00"	-	Ball	-	Hubless	P078449H
O4-R5711	15 W	115	0.37	PSC	1/1550	CW	3.50"	3.87"	Unit	-	Threaded	P41661
O4-R5720	15 W	115	0.37	PSC	1/1550	Rev	3.50"	3.87"	Unit	-	Threaded	P23956
O4-R2011	20 W	115	0.80	SP	1/1550	CW	3.75"	3.5"	Unit	-	Threaded	PP20934F



Hussmann

Part #	Watts	Volts	CFM	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O3-RF2466	14	115VAC	105	-	3000	-	-	Axial	Ball	-	-	392466 PS2CDB51-125012012 Conair 039865
Part #	HP/W	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
EE-5610	6 W	115	0.40	SP	1/1550	CW	3.30"	3.87"	Unit	-	Threaded	38360
O4-R6711	6,9,12 W	115	0.2-0.3	ECM	1/1550	CCW	2.53"	3.87"	Unit	-	Threaded	SVC #110.441.0546
R1-R101	9 W	115	0.90	SP	1/1550	CW	2.36"	3.3"	Sleeve	-	0.7" Hubless	Evap. Motor
R1-R101L	9 W	115	0.90	SP	1/1550	CW	2.36"	3.3"	Sleeve	-	0.7" Hubless	Evap. Motor w/ leg mount
R1-R103	9 W	115	0.90	SP	1/1550	CCW	2.36"	3.3"	Sleeve	-	0.7" Hubless	Evap. Motor
R1-R103L	9 W	115	0.90	SP	1/1550	CCW	2.36"	3.3"	Sleeve	-	0.7" Hubless	Evap. Motor w/ leg mount
EE-5611	9 W	115	0.52	SP	1/1550	CW	3.30"	3.87"	Unit	-	Threaded	47000, 58698
O4-R5611	9 W	115	0.60	SP	1/1550	CW	3.07"	3.87"	Unit	-	Threaded	7000, 58698
O4-R5612	9 W	115	0.60	SP	1/1550	CCW	3.07"	3.87"	Unit	-	Threaded	38360
O4-R9211	13 W	115	0.47	ECM	1/1725	CW	2.53"	3.87"	Unit	-	Hubless	4410547, 441-547
O4-R5711	15 W	115	0.37	PSC	1/1550	CW	3.50"	3.87"	Unit	-	Threaded	301263, 301264, 329646, 400603
O4-R5720	15 W	115	0.37	PSC	1/1550	Rev	3.50"	3.87"	Unit	-	Threaded	302555, 254582, 411151
O4-R3511	35 W	115	1.40	SP	1/1500	CW	3.50"	3.87"	Unit	-	0.7" Hubless	TFM351, HUSSMANN 328346, COPELAND 050-0227-01
R4-R3011	1/8	230	1.00	PSC	1/1550	CW	3.75"	5.5"	Sleeve	5/370	2.0" x 1/2"	3011, 5KSP39DG2221S 5KSP39DG4220AS



Hussmann

Part #	HP/W	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R4-R30575	1/6	575	0.50	PSC	1/1550	Rev	4.50"	5.5"	Sleeve	Inc	2.2" x 1/2"	77238
R4-R34201	1/5	575	0.50	PSC	1/1075	CW	4.50"	5.5"	Sleeve	Inc	2.5" x 1/2"	204201
R4-R3009	1/5	230	1.60	PSC	1/1075	CW	4.25"	5.5"	Sleeve	5/370	3.0" x 1/2"	3009, D805 5KCP39GG3611AS
R4-R3012	1/5	208/230	1.40	PSC	1/1075	CW	4.18"	5.5"	Ball	5/370	3.0" x 1/2"	1648, K55CLN1782, K55HXKWA8573, 3008, 3012, 5KCP39GG5606S, 5KCP39GG765S, 5KCP39GGC052T, 5KCP39GN765, 5KSP39GGA967T, P011-96203
R6-R49983	1/2	208/230	2.70	PSC	1/1725	CW	5.18"	5.5"	Ball	5/370	3.5" x 1/2"	0644, 644, K644, K055SME164467, K55HXCTP9963, K55HXSME-1644, D890, 259983
M5-T2538	1	208/230/460	5.30	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	170518, 502595
M5-T2540	1	575	2.00	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	170517, KPN502597

Ideal Evaporator Motor

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
T1-R611	1/300	115	0.54	SP	1/1550	CW	0.50"	Skel	Sleeve	-	2.2" x 0.1811"	SM601, 23303, 3008001
R1-R108	1/100	115	0.55	SP	1/1550	CCW	1.94"	3.3"	Sleeve	-	0.70" Hubless	124574, 76108, SM108
R1-R123	1/50	115	0.60	SP	1/1550	CW	2.44"	3.3"	Sleeve	-	0.60" Hubless	76123



Intercity

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M3-R2609	1/30	115	1.21	SP	1/1550	CW	3.0"	4.1"	Sleeve	-	2.4"×1/2"	Intercity, UE 009
M3-R2612	1/30	115	1.21	SP	1/1550	CCW	3.0"	4.1"	Sleeve	-	2.4"×1/2"	Intercity, UE 010

Keeprite (cont. next page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R3-R360	1/35	115	1.0	SP	1/1550	CW	2.60"	3.3"	Sleeve	-	1.6"×1/4"	Keeprite 504249
R3-R291	1/30	115	1.3	SP	1/1550	CW	2.50"	3.3"	Sleeve	-	1.6"×1/4"	Keeprite 1043291
M3-R2811	1/20	115	2.1	SP	1/1050	CCW	2.8"	5.0"	Sleeve	-	2.1"×1/2"	Keeprite Ref. 28110, 7151-2253C
R3-R370	1/20	115	0.75	Inc.	1/1550	CW	3.98"	3.3"	Ball	Inc.	2.7"×5/16"	Keeprite 505124, Fasco 7190-2366
R3-R371	1/20	208/230	0.38	Inc.	1/1550	CW	3.98"	3.3"	Ball	Inc.	2.7"×5/16"	Keeprite 505125, Fasco 7190-2367, A.O. Smith JE2G052
R3-R1052	1/20	115	2.0	SP	1/1550	CCW	3.10"	3.3"	Ball	-	3.20"×5/16"	Keeprite 1043336, Fasco 7163-8722N, A.O. Smith JA2Y016-M, Rotom R358
R3-R1053	1/20	230	1.0	SP	1/1550	CCW	3.10"	3.3"	Ball	-	3.20"×5/16"	Keeprite 1043766, Fasco 7163-8861M, A.O. Smith JA2Y017-N
M3-R2817	1/20	115	1.55	SP	1/1550	CCW	3.30"	4.1"	Sleeve	-	2.0"×1/2"	Keeprite 28175, Fasco 7108-2217C
M4-R2269	1/15	115	2.40	SP	1/1050	CCW	3.00"	5.0"	Sleeve	-	3.0"×1/2"	160269



M3-R2657



M3-R2658



M2-R22576



M4-R2423



M2-R31672



M2-R30409



M2-R31065



M2-R30900



M5-T2538



M5-T2540



R6-R42464



M5-S1454

Keeprite (cont. from previous)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M3-R2657	1/15	230	1.20	SP	1/1550	CW	3.40"	4.3"	Sleeve	-	1.8"x3/8"	Keeprite 81335 Fasco 7108-2230C
M3-R2658	1/15	115	2.30	SP	1/1550	CW	3.40"	4.3"	Sleeve	-	1.8"x3/8"	Keeprite 81356 Fasco 7108-2206C
M2-R22576	1/9	208/230	0.6	PSC	2/1060	CW	3.8"	5.5"	Sleeve	3/370	2.3"x1/2"	Keeprite Hotel Season Incremental 128576
M4-R2423	1/8	115	1.8	PSC	3/1330	CW	3.4"	5.0"	Sleeve	10/370	5.0"x1/2"x2.0"	Keeprite 200423, Rotom R780
M2-R31672	1/6	208/230	1.5	PSC	2/1075	CW	4.0"	5.5"	Ball	7.5/370	3.5"x1/2"	Keeprite 171672, 120240 Keeprite 120409, 1041300, A.O. Smith HF2J040-N, Fasco 7124-0021
M2-R30409	1/5	208/230	1.80	PSC	1/1550	CCW	4.60"	5.5"	Sleeve	4/370	3.0"x1/2"	
M2-R31065	1/4	575	0.50	3 Ph	1/1140	Rev	6.30"	5.5"	Ball	-	2.9"x5/8"	171065, HM3G004
M2-R30900	1/2	208/230	2.3	PSC	1/1075	CW	5.25"	5.5"	Ball	7.5/370	4.0"x5/8"	510900
M5-T2538	1	208/230 460	5.30	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	170518
M5-T2540	1	575	2.0	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6"x5/8"	170517
R6-R42464	1	208/230	5.4	PSC	3/1075	Rev	6.5"	5.5"	Ball	12.5/370	3.5"x5/8"	504464
M5-S1454	1	208/230 460	4.80	PSC	1/1075	Rev	10.70"	6.5"	Ball	25/370	6"x5/8"	170619



Krack

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
US-R91189	1/20	115/208/230	1.6/0.8	SP	1/1550	CCW	3.15"	3.3"	Sleeve	-	1.65"x5/16"	11528, 11529, JB2P046N, JA2P216N, JA2P217N, JB2P047N, 8354110940, 8254111030
R3-R313	1/15	120	2.2	SP	1/1550	CCW	3.60"	3.3"	Ball	-	3" x 5/16"	5034LS, 5008SS, U-572
R3-R314	1/15	208/230	1.3	SP	1/1550	CCW	3.50"	3.3"	Sleeve	-	3" x 5/16"	5044MS, 5008TS, U-573
UE-9634	1/15	208/230	0.30	PSC	1/1550	CCW	3.62"	3.3"	Sleeve	4/370	1.5"x5/16"	JE2F030, E206448
M5-T3572	1/2	208/230/460	2.0	3 Ph	1/1140	Rev	9.25"	6.5"	Ball	-	2.0"x5/8"	150372, 11096
M5-T3537	1	208/230/460	4.4	3 Ph	1/850	Rev	10.25"	6.5"	Ball	-	3.25"x5/8"	151437, 11503

Kysor

Part #	Watts	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O4-R5711	15	115	0.37	PSC	1/1550	CW	3.50"	3.87"	Unit	-	Threaded	09A10-054, 09A10-055
O4-R5715	15	115	0.37	PSC	1/1550	CW	3.50"	3.87"	Unit	-	Threaded	73049
O4-R5720	15	115	0.37	PSC	1/1550	Rev	3.50"	3.87"	Unit	-	Threaded	09A10-056

Larkin

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
US-R90574	1/20	115	1.90	SP	1/1550	CW	2.75"	3.3"	Sleeve	-	2.48"x5/16"	7136-2113, 253-1194
US-R90575	1/20	230	0.89	SP	1/1550	CW	2.75"	3.3"	Sleeve	-	2.48"x5/16"	7136-3371, 253-1195
US-R90721	1/12	115/208/230	1.1/06	PSC	1/1550	Rev	3.59"	3.3"	Ball	4/370	3.15"x5/16"	25308601, 25309101, 2531194, 2531195

Liebert

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Shaft	Comments
M5-T2535	3/4	575	1.25	3 Ph	1/1140	Rev	10.31"	6.5"	Ball	6.0" x 5/8"	Liebert 1C16992P1 Computer Rooms
M5-T2531	3/4	208/230/460	4.00	3 Ph	1/1400	Rev	8.10"	6.5"	Ball	6.0" x 5/8"	Liebert 1C16992P1 Computer Rooms



Lennox (cont. next page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
UE-9484	1/15	208/230	0.60	PSC	1/1050	CW	3.75"	4 5/16"	Sleeve	4/370	2.5"x3/8"x1.3"	P-8-9584
UE-9485	1/12	208/230	0.80	PSC	2/1050	CCW	3.75"	4 5/16"	Sleeve	4/370	2.5"x3/8"	P-8-9485
UE-9403	1/8, 1/6, 1/5	115	6.40	SP	3/1075	CCW	4.0"	5.0"	Sleeve	-	3.0"x1/2"	GE5KSP29KK1542S, FASCO D1030, P-8-3789, P-8-3790, P-8-3529, P-8-3527, P-8-9662
UE-442C	1/6	208/230	0.95	PSC	1/1075	Rev	3.74"	5.5"	Sleeve	5/370	5.5"x1/2"	P-8-3132, K55HXB MJ1121, 8053
M4-R2368	1/5	115	3.5	PSC	4/1030	CCW	4.50"	5.0"	Sleeve	4/370	3.5"x1/2"	P9662
R6-R42702	1/4	230	2.1	PSC	1/1075	CCW	4.0"	5.5"	Sleeve	4/370	3.5"x1/2"	P-8-3132, K55HXB MJ1121, 8053
DD-035	1/3	115	5.0	PSC	4/1075	Rev	4.30"	5.5"	Sleeve	10/370	6"x1/2"	P-8-7505
M2-R32217	1/3	230	2.1	PSC	1/825	CCW	5.75"	5.5"	Ball	4/370	3.5"x1/2"	5KCP39NGC119S, KCP39NGL5715, 3501, 3591
R6-R42310	1/3	115	6.0	PSC	4/1075	CCW	4.18"	5.5"	Sleeve	5/370	5.18"x1/2"	P-8-7505, P-8-9450, 41A4201, 3082, F48SJ6MA21, F48SL6M7, 5KCP39HG9174AS, 321P267 K55HXENB-2994
M2-R38041	1/3	208/230	2.0	PSC	1/1075	CCW	4.37"	5.5"	Sleeve	5/370	3.5"x1/2"	3044, 5KCP39HGD766T, 5KCP39HD9530S, K7994, 3592, K55FCM3264, P-8-8041
R6-R48609	1/3	208/230	2.6	PSC	4/1075	CCW	4.67"	5.5"	Sleeve	7.5/370	3.0"x1/2"	5KCP39HG9546S, 5KCP39HGK020T, 3087, P-8-8609
UE-9405	3/4	115	9.7	PSC	5/1075	CCW	5.37"	5.5"	Ball	40/370	3.18"x1/2"	28F0101, 58H2201, EMK55HXWNZ7057
UE-9406A	3/4	208/230	6.6	PSC	3/1075	CCW	6.25"	5.5"	Ball	10/370	6.5"x5/8"x5.2"	31C8201
R6-R43520	3/4	460	2.0	PSC	3/1075	CCW	5.53"	5.5"	Ball	20/370	2.5"x1/2"	EM K55HXRYT-8180 43G5201

OEM Replacement Motors



Lennox (cont. from previous)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R32117	1/3	208/230	2.00	PSC	1/1075	Rev	6.00"	5.5"	Ball	10/370	6.0"×1/2"	S3050, P-8-9662
M1-R52820	3/4	208/230	4.20	PSC	3/1075	CW	7.80"	5.5"	Ball	10/370	5.3"×5/8"×4.8"	31C8102 - Includes Base
M2-R32050	3/4	575	1.65	PSC	3/1025	Rev	6.50"	5.5"	Ball	15/370	4.0" × 1/2"	Rooftop Direct Drive Motor
M2-R32051	3/4	460	2.15	PSC	3/1075	Rev	6.63"	5.5"	Ball	15/370	4.0" × 1/2"	43G52
M5-S7401	1	230	5.0	PSC	1/1075	CCW	5.87"	5.5"	Ball	20/370	4.0" × 5/8"	88C7401
M5-S7301	1	460	2.9	PSC	1/1075	CCW	6.5"	5.5"	Ball	15/370	4.0" × 5/8"	88C7301

Nutech

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O1-R465	1/15	115	2.3	SP	3/1550	CCW	4.0"	3.3"	Sleeve	-	2.3"×5/16"×2.1"	Electrohome 2868-513-133, 152, Nutech Lifebreath 23202
M4-R2655	1/12	115	2.3	PSC	1/1550	CCW	3.0"	5.0"	Sleeve	5/370	2.5"×3/8"×2.4"	AO812B2355
M4-R2324	1/12	115	1.1	PSC	1/1550	CCW	3.0"	5.0"	Ball	Inc	2.5"×3/8"×2.4"	Nubreath 23-204, GE5KCP298G8560BS

Nordyne

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
FB-RFB902	1/19	115	0.70	PSC	3450	CCW	5.50"	3.3"	Ball	4/370	Blower	903962, G5RC, G6RC, G1, G4

Nutone / Broan

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
R7-RB11	1/130	115	0.65	SP	1/3000	CW	0.60"	Skel	Sleeve	-	1.7"×7/32"	BF3C-MBB, 118445, 208370856, 67PCF
R7-RB109	1/60	115	1.00	SP	1/2400	CW	0.90"	Skel	Sleeve	-	1.2"×7/32"	10941067, Broan "BP" Series, Nutone "RL" Series



Olsen

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
R6-R44587	1/2	115	5.7	PSC	4/1075	CCW	5.25"	5.5"	Sleeve	10/370	3/4" x 1/2"	27836, 26088
R6-R44589	3/4	115	11.0	PSC	4/1075	CCW	5.80"	5.5"	Sleeve	20/370	3/4" x 1/2"	27161

Rheem-Ruud

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R21853	1/6	208/230	0.90	PSC	1/1075	CCW	3.67"	5.5"	Sleeve	3/370	3.75" x 1/2"	3222, 5KCP39BGN253S 5KCP39BGP085S, 51-21853-01
M2-R22719	1/5	208/230	1.10	PSC	2/1075	Rev	3.75"	5.5"	Sleeve	5/370	5.5" x 1/2"	20682-01, 20673-01, 20675-01, K55HXMBZ06560 K136, 8735660130, 442, 82673
UE-795A	1/5	208/230	1.60	PSC	1/825	Rev	4.25"	5.5"	Sleeve	5/370@230 7.5/370@208	3.6" x 1/2"	51-23055-12, 3153
M2-R22170	1/5	208/230	1.40	PSC	1/1075	Rev	3.87"	5.5"	Sleeve	3/370	4.25" x 1/2"	5484, KA55HXMTPT-6557, 51-20672-01, 51-20673-01 51-20674-01, 51-20675-01 51-20679-01, 51-20680-01 51-20681-01, 51-20682-01 51-21826-01, 51-21827-01 51-21828-01, 51-21829-01 51-21830-01, 51-21831-01 51-21185-01, 51-20761-01
M2-R22437	1/4	208/230	1.60	PSC	1/1075	Rev	4.0"	5.5"	Sleeve	5/370	5.5" x 1/2"	5KCP39FGD117BS 5KCP39GGE879AS, 437
M2-R23103	1/4	208/230	2.00	PSC	2/825	Rev	4.37"	5.5"	Sleeve	7.5/370	3.37" x 1/2"	51-23103-06, 51-21543-01
M2-R22444	1/3	208/230	2.20	PSC	1/1075	Rev	4.37"	5.5"	Sleeve	7.5/370	5.5" x 1/2"	51-20688-01, 87360, 60130
M2-R21189	1/3	208/230	1.80	PSC	1/1075	Rev	4.37"	5.5"	Sleeve	5/370	3.25" x 1/2"	51-21189-01, KA55HZRGR-7898
M2-R22307	1/3	208/230	2.80	PSC	2/825	CCW	4.67"	5.5"	Sleeve	10/370	2.18" x 1/2"	51-23103-07



Rheem-Ruud

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R22401	1/3	208/230	2.00	PSC	1/1075	Rev	4.12"	5.5"	Sleeve	7.5/370	6.7"×1/2"	K55HXTDD-8385, 5458 51-20668-11, 51-23055-11 51-20354-11, 51-23053-11
M2-R22402	1/3	208/230	2.00	PSC	1/1075	Rev	4.12"	5.5"	Ball	7.5/370	6.7"×1/2"	K55HXTDD-8385, 5458 51-20668-11, 51-23055-11 51-20354-11, 51-23053-11
R6-R42873	1/2	115	5.70	PSC	4/1050	CCW	4.67"	5.5"	Sleeve	7.5/370	3.5" × 1/2"	F48C45A94, 51-22873-01
R6-R43103	1/2	208/230	3.40	PSC	1/825	CCW	4.87"	5.5"	Sleeve	15/370	3.25"×1/2"	51-23103-08, 51-23101-08
UE-435A	1/2	460	1.70	PSC	1/1075	Rev	5.12"	5.5"	Ball	7.5/370	6.0"×1/2"	51-20470-01
R6-R42686	1/2	115	5.90	PSC	3/1075	CCW	4.50"	5.5"	Sleeve	7.5/370	3.75"×1/2"	51-22686-01
R6-R42859	3/4	115	10.5	PSC	4/1075	Rev	5.65"	5.5"	Ball	15/370	5.0"×1/2"	F48C47A94, 51-22859-01
UE-794A	3/4	115	11.5	PSC	4/1075	Rev	6.00"	5.5"	Sleeve	15/370	5.0"×1/2"	51-23017-41

Ref Plus

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
EC-34W115-V1543	34W	115	1.60	SP	1/1550	CW	3.55"	-	Sleeve	-	Hubless	RMT0004
EC-34W230-V1542	34W	230	0.80	SP	1/1550	CW	3.55"	-	Sleeve	-	Hubless	RMT0005
R3-R368	1/20	115	1.7	SP	1/1550	CW	2.7"	3.3"	Sleeve	-	2.7"× 5/16"	RMT0011, JA2N267N, 7173-1539
R3-R369	1/20	208/230	0.9	SP	1/1550	CW	2.7"	3.3"	Sleeve	-	2.7"× 5/16"	RMT0012, JA2N268N, 7173-1538

Remington Singer

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M4-R2675	1/30	208/230	0.4	PSC	4/1075	CCW	3.8"	4.75"	Sleeve	2/370	7.7"×1/2"×7.7"	American Air Filter-Singer Climate Control 02024224
M2-R139	1/8	208/230	2.2	PSC	1/1075	CW	4.0"	5.5"	Sleeve	4/5/370	9.0"×1/2"	Remington Singer 21662R, Franklin 74007



Tecumseh

Part #	Watts	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
O4-R5211	4	120	0.29	SP	1/1550	CW	4.50"	3.8"	Unit	-	Hubless	TFM41
O4-R5311	6	120	0.36	SP	1/1550	CW	2.80"	3.5"	Unit	-	Hubless	TFM61
O4-R5421	9	208/230	0.29	SP	1/1550	CW	2.80"	3.5"	Unit	-	Hubless	TFM91
O4-R5411	9	120	0.58	SP	1/1550	CW	2.80"	3.5"	Unit	-	Hubless	TFM62, 92
O4-R3512	35	208/230	0.70	SP	1/1550	CW	3.50"	3.8"	Unit	-	Hubless	TFM352
O4-R3511	35	120	1.40	SP	1/1550	CW	3.50"	3.8"	Unit	-	Hubless	TFM351
O4-R3612	35	230	0.70	SP	1/1550	CW	3.50"	3.8"	Unit	-	1.4"x5/16"	TFM262, TFM362
O4-R5022	50	230	0.85	SP	1/1500	CCW	4.50"	3.8"	Unit	-	1.5"x3/8"	810A31B, 810G037A20
O4-R5112	50	230	0.85	SP	1/1500	CW	4.50"	3.8"	Unit	-	1.4"x5/16"	810M50A62
O4-R5122	50	230	0.85	SP	1/1550	CCW	4.00"	3.8"	Unit	-	2.0"x5/16"	TFM502

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
UE-9488	1/20	115	1.70	SP	1/1500	CW	4.875"	3.3"	Sleeve	-	2 1/8" x 5/16"	TMF191, TFM265, 810E019A080, EM F33HXGFG-2876
M4-R2372	1/20	230	1.10	SP	1/1550	CW	3.0"	5.0"	Sleeve	-	2.8" x 3/8"	Tecumseh TFM372, 810S037B01, 326P137, Copeland
M4-R2601	1/15	230	1.30	SP	1/1500	CW	3.0"	5.0"	Sleeve	-	2.75" x 5/16"	810S050A99, 326P136
UE-981	1/15	460	0.60	SP	1/1550	CW	4.25"	3.3"	Sleeve	-	2.5" x 5/16"	810G037A47, Fasco D475 GE 5KSP11FG1197CS
UE-9487	1/12	230	1.30	sp	1/1500	cw	4.875"	3.3"	Sleeve	-	2 1/8" x 5/16"	TFM262, 810E026A81, EM F33HXDJ-3668
M2-R31862	1/4	230	1.90	PSC	1/1625	CW	4.375"	5.5"	Ball	4/370	2.5" x 1/2"	TFM1862, 8330, KA55HXKGD8330
M2-R31864	1/4	460	0.80	PSC	1/1625	CW	4.375"	5.5"	Ball	4/370	2.5" x 1/2"	TFM1864, 8331 KA55HGE8331



Temspec

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Frame	Bearing	Cap	Shaft	Comments
M4-R2197	1/14	115	1.25	PSC	3/820	CCW	3.8"	5.0"	Sleeve	7.5/370	3.4"x1/2"	DE3E142N
M4-R2198	1/14	115	1.25	PSC	3/820	CCW	3.8"	5.0"	Sleeve	7.5/370	3.4"x1/2"	DE3E142N
M4-R2194	1/14	115	1.25	PSC	3/820	CCW	3.5"	5.0"	Sleeve	7.5/370	3.4"x1/2"	DE3E141N
M4-R2195	1/12	115	2.10	PSC	3/740	CCW	4.6"	5.0"	Sleeve	7.5/370	3.4"x1/2"	DE3F056N
M4-R799	1/8	115	3.00	PSC	5/1075	CCW	3.87"	5.0"	Ball	5/370	5.0"x1/2"	L350, L450, L600, UE DA3E200, DA3F100, DA3G142

Trane (cont. next page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
UE-641	1/30	115	0.5	PSC	3/1075	CW	3.5"	5.0"	Sleeve	Inc.	8.5"x1/2"x9"	MOT 1876, CX70500133-01, UE DE3E152
UE-954	1/30	115	0.6	PSC	3/1100	CW	4.0"	5.0"	Sleeve	Inc.	8.5"x1/2"	MOT 1878, MOT 1875, X70500149-01-7, EM K48HXYH-954
UE-952	1/30	115	0.74	PSC	3/1100	CW	3.75"	5.0"	Sleeve	Inc.	8.5"x1/2"x9"	EM K48XBJP-969, X70500149-03-7, MOT-1876
UE-373	1/30	115	0.64	PSC	2/1100	CW	4.25"	5.0"	Sleeve	Inc.	10.5"x1/2"x10.5	Fan Coil
UE-372	1/25	115	0.64	PSC	2/1060	CW	3.5"	5.0"	Sleeve	Inc.	11"x1/2"x11"	Fan Coil
UE-9608	1/20	115	0.6	PSC	3/1100	Rev	3.25"	5.0"	Sleeve	Inc.	9.5"x1/2"	MOT 1875, X70500149-02, EM K48HXBH-955
UE-953	1/15	115	0.8	PSC	3/1100	CW	3.25"	5.0"	Sleeve	Inc.	10.5"x1/2"x10.5"	MOT 1877, X70 500149-04-7, EM K48HXBH-956



Trane (cont. from previous page)

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
UE-680A	1/8	115	1.50	PSC	3/775	CCW	5.0"	5.5"	Sleeve	Inc.	11.5"x1/2"x11.5"	MOT-711
UE-598	1/8	230	1.90	SP	1/1550	CCW	4.25"	5.0"	Sleeve	-	3.0"x1/2"	5KSP29DK1728S
UE-945	1/8	115	1.2	PSC	3/1500	CW	4.0"	5.0"	Sleeve	Inc.	9"x1/2"x7.5"	MOT 1978, MOT 481, X70 500149-11-7, EM K48HXCKT-1419
UE-492	1/8	230	1.10	PSC	1/1550	CCW	3.5"	5.0"	Sleeve	Inc.	3.0"x1/2"	5KSP29DK1728S
M2-R31673	1/8	200/230	0.90	PSC	1/1650	CCW	3.62"	5.5"	Sleeve	4/370	1.5"x1/2"	3D149098P01, 1673 K55DJK-6905
M4-R1050	1/4	208/240	0.90	PSC	1/1550	CCW	3.37"	5.0"	Sleeve	Inc.	3.18"x1/2"	D1050, 3438, 5KSP29DK1728S, 322P815
UE-955	1/6	115	2.00	PSC	3/1500	CW	4.0"	5.0"	Sleeve	Inc.	10.5"x1/2"x10.5"	X70 500149-12-7, MOT-1979, MOT-482, EM, K48HXCKS-1418
R6-R46086	1/5	115	2.30	PSC	4/1075	CCW	4.18"	5.5"	Sleeve	10/370	3.5"x1/2"	D340086P02
UE-642	1/4	277	1.10	PSC	3/1475	CW	4.0"	5.0"	Sleeve	Inc.	8"x1/2"x8"	MOT 689, X70500354, UE DE2G101
M2-R22983	1/4	200/230	1.50	PSC	1/825	CCW	4.62"	5.5"	Ball	12.5/370	2.5"x1/2"	3D146983P01, 1674, K55DJL-6906
R6-R42604	1/3	575	0.80	PSC	1/1100	Rev	5.80"	5.5"	Ball	7.5/440	6" x 1/2"	MOT2604, 25G20
R6-R46126	1/3	115	6.80	PSC	4/1075	CCW	4.87"	5.5"	Sleeve	10/370	3.0"x1/2"	D340126P02
R6-R42605	1/2	575	1.00	PSC	1/1625	Rev	5.60"	5.5"	Ball	7.5/440	6" x 1/2"	M02605, 173329, HF2J043
R6-R42606	1/2	575	1.10	PSC	1/1100	Rev	5.50"	5.5"	Ball	7.5/370	6" x 1/2"	TRANE, COMFORTAIRE
R6-R42607	3/4	575	1.60	PSC	1/1075	Rev	6.00"	5.5"	Ball	15/370	6" x 1/2"	HM3T071, MOT2607, 48A11T566



Trane (cont. from previous page)


Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M5-S1454	1	208/230/460	4.8	PSC	1/1075	CW	10.75"	5.5"	Ball	25/370	6.0"x5/8"	MOT2461
M5-T2538	1	208/230/460	5.30	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	MOT2463
M5-T2540	1	575	2.0	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	MOT2914
M5-S1456	1½	208/230/460	3.3/6.6	PSC	1/1075	Rev	12.06	5.5"	Sleeve	25/370	6.0"x5/8"	MOT2462
M5-T2542	1½	208/230/460	5.80	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	MOT2464
M5-T2543	1½	575	2.30	3 Ph	1/1140	Rev	10.81"	6.5"	Ball	-	6.0"x5/8"	MOT1590

True

Part #	Watts	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O4-R5411	9	115	0.58	SP	1/1550	CW	2.80"	3.5"	Unit	-	Threaded	936833, 800402
O4-R5401	9	115	0.60	SP	1/1550	CW	2.80"	3.5"	Unit	-	Threaded	800401, All-angle evaporator motor
O4-R5730	9	115	0.26	PSC	1/1600	Rev	3.13"	3.5"	Unit	-	Threaded	Reversible PSC condenser fan motor c/w wiring harness for Pepsi
O4-R5811	16	115	1.00	SP	1/1550	CW	3.03"	3.5"	Unit	-	Threaded	800469

Tyler

Part #	HP/ W	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
O4-R5715	15 W	115	0.37	PSC	1/1550	CW	3.50"	3.87"	Unit	-	Threaded	5215879, 5237801
O4-R5720	15 W	115	0.37	PSC	1/1550	Rev	3.50"	3.87"	Unit	-	Threaded	5212930
T1-R605	1/55	115	1.00	SP	1/2800	CW	0.90"	Skel	Sleeve	-	1.7" x 0.1811"	SM605, 79103, 79104, E310131, P211116966A
R4-R3042	1/4	230	1.90	PSC	1/1625	CCW	4.61"	5.5"	Sleeve	Inc.	2.5" x 1/2"	S3042, FASCO D870

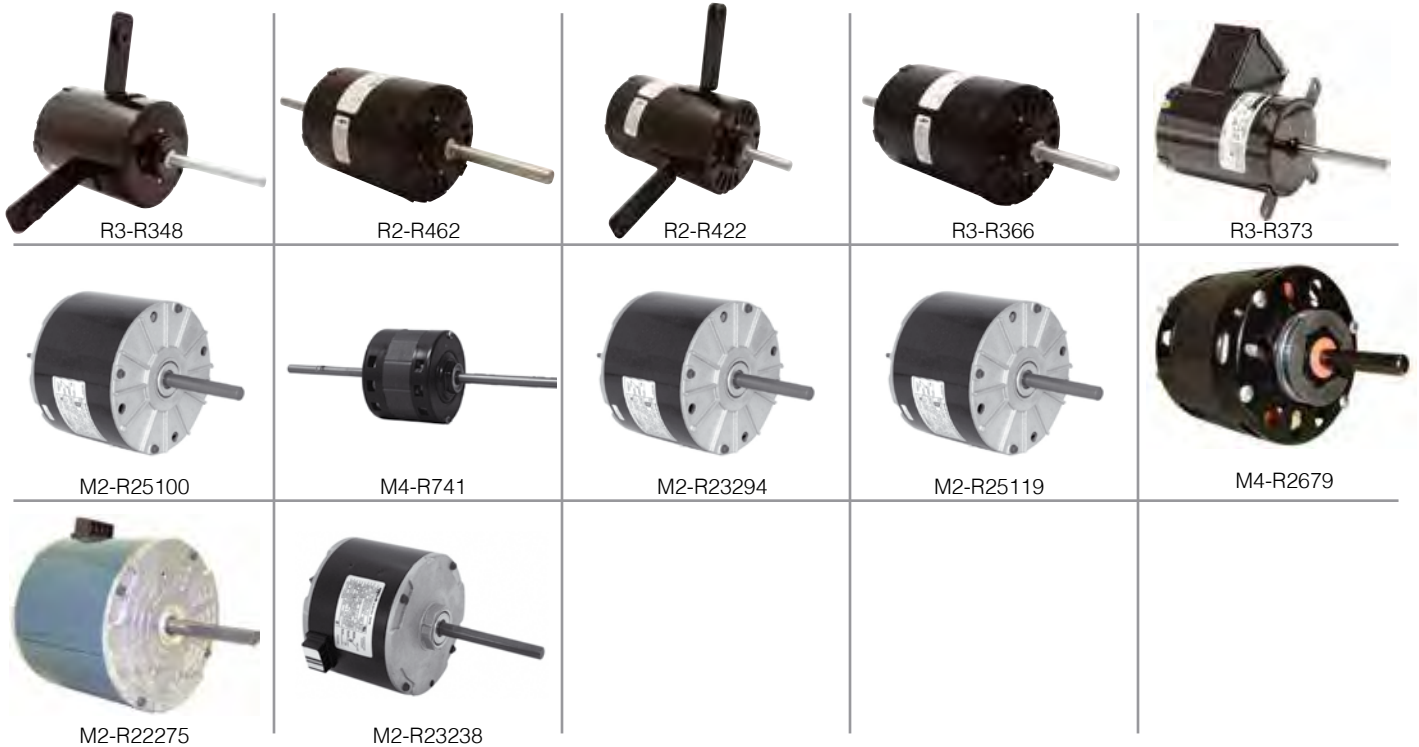

Vanee

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R3-R348	1/15	110/115	1.12	PSC	1550	CW	4.0"	3.3"	Sleeve	4/370	3.25 x 5/16	HRV - M1703, 71900369

Venmar

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R2-R462	1/8	115	0.90	PSC	3/1660	CW	4.13"	3.3"	Sleeve	7.5/370	3.5"x3/8"x3.5"	02101, Fasco 7190-2271, Kit 12027, 12029, 12109
R2-R422	1/3	115	2.89	PSC	3/1690	CW	4.93"	3.3"	Sleeve	7.5/370	3/8"x2.06"	02209, Fasco 7190-1522
R3-R366	1/4	115	1.68	PSC	3/1630	CW	4.78"	3.3"	Sleeve	7.5/370	2.97"x3/8"x3.00"	02100, Fasco 7190-1523, Kit 1206, 12151

W.W. Grainger - Dayton

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R3-R373	1/15	115	0.90	PSC	1/1400	CCW	4.50"	3.3"	Sleeve	4/250	3.0"x3/8"	Dayton Greenhouse Fan Motor, Fasco 7190-1004

York

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
M2-R25100	1/8	208/230	0.80	PSC	1/1075	CW	3.75"	5.5"	Sleeve	4/370	1.8"x1/2"	F48A85A50, 3217, 024-25100-000, 024-2500-700
M4-R741	1/5	208/230	1.40	PSC	1/1075	CW	3.87"	5.0"	Sleeve	5/370	6.3"x1/2"x6.3"	024-17774, 2091, 024-20795-700
M2-R23294	1/4	208/230	1.30	PSC	1/1075	CW	4.0"	5.5"	Sleeve	5/370	3.0"x1/2"	F48A45A50, 3223, 024-23294-000
M2-R25119	1/4	208/230	1.40	PSC	1/850	CW	4.43"	5.5"	Sleeve	5/370	3.18"x1/2"	F48B46A50, 024-25119-000
M4-R2679	1/4	115	10.00	SP	3/1075	CCW	4.0"	5.0"	Sleeve	-	2.2"x1/2"	024-17903-703
M2-R22275	1/4	460	0.70	PSC	1/850	CW	5.0"	5.5"	Sleeve	5/350	3.0"x1/2"	York 024-27501-000, A.O. Smith F4832A50
M2-R23238	1/2	208/230	2.50	PSC	1/1090	CW	4.87"	5.5"	Sleeve	7.5/370	4.0"x1/2"	5KCP39LGN418S, 024-24110-001, W48A11T388



York

Part #	HP	Volts	Amps	Type	RPM	Rot.	Body	Dia	Bearing	Cap	Shaft	Comments
R6-R45113	1/2	115	9.80	PSC	3/1110	CCW	5.37"	5.5"	Sleeve	10/370	4.5"×1/2"	5KCP39NGP941S, 024-25113-001
M1-R52775	1/2	230	4.30	PSC	1/1050	CW	5.25"	5.5"	Sleeve	5/370	9.3"×1/2"×9.3"	024-17775, 024-20797-700
M2-R32716	1/2	460	2.00	PSC	2/1075	Rev	5.50"	5.5"	Ball	10/370	6.4"×1/2"	024-18412-006
M2-R32957	1/2	460	2.00	PSC	1/1075	CCW	7.50"	5.5"	Ball	5/370	4.25"×1/2"	024-183957-00
M2-R32511	1/2	208/230	3.50	PSC	1/1100	CCW	8.10"	5.5"	Ball	3/370	3.7" × 1/2"	Rooftop motor, 024-17420, 024-19511-000, YCFM12
M2-R32512	1/2	460	1.50	PSC	1/1100	CCW	8.30"	5.5"	Ball	5/440	4.8" × 1/2"	Rooftop motor, 024-19512-000 151015, H3TO27, 02419512
M2-R22140	1/2	208/230	2.70	PSC	1/1090	CW	4.80"	5.5"	Sleeve	7.5/370	3.4" × 1/2"	024-24110-001,701,713
R6-R43241	1/2	208/230	4.40	PSC	3/1000	CCW	5.125"	5.5"	Sleeve	7.5/370	4" × 1/2"	York 024-241106-000, A.O. Smith F48L49A50
M2-R32184	1/2	208/230	5.10	PSC	3/1075	CW	5.25"	5.5"	Sleeve	5/370	1/2" × 3"	York 024-18403-011, GE 5KCP39PGE61OS
M2-R32671	3/4	208/230	2.20	PSC	3/1059	CCW	5.625"	5.5"	Ball	12.5/370	1/2" × 3 3/4"	York 024-21671-000, A.O. Smith F48L33A50
M2-R32050	3/4	575	1.65	PSC	3/1025	Rev.	6.50"	5.5"	Ball	15/370	4.0" × 1/2"	Direct Drive Evaporator Motors
M2-R32051	3/4	460	2.15	PSC	3/1075	Rev.	6.63"	5.5"	Ball	15/370	4.0" × 1/2"	Direct Drive Evaporator Motors
R6-R43238	1	115	12.9	PSC	3/1075	CCW	5.87"	5.5"	Ball	15/440	3.5"×1/2"	5KCP39PGN812S
M2-R32058	1	208/230	7.00	PSC	3/1100	CCW	6.10"	5.5"	Ball	15/370	4.0" × 1/2"	024-23238-000, F48SU6V15 024-21672C, 024-21673

Armstrong / B&G Direct Replacement


Single Shaft • Single Speed • 1725 RPM

115/230/460/575 Volts • Resilient Rings for Base Mount Models • Open Construction • Reversible


Typical Applications : Hot Water Boiler & Booster Pumps



CP-R1350
Illustrated




CP-R1311
Illustrated



CP-R1320
Illustrated



CP-R1310
Illustrated



CP-R1352
Illustrated



CP-R1444
Illustrated

Part #	HP	Volts	Fig.	Bearing	Cross Reference
CP-R1350	1/12	115	1	Ball	805316-010, 831000-61, 111034
CP-R1311	1/12	115	2	Sleeve	Taco Replacement
CP-R1320	1/8	115	3	Sleeve	CCW, 5KH32EG129GA, 48S17D1084
CP-R1310	1/8	115	4	Sleeve	OBG2004
CP-R1351	1/6	115	1	Ball	817025-005, 111061
CP-R1352	1/6	115	5	Ball	817025-001, 831001-061, 111031
CP-R1354	1/4	115	5	Ball	817025-007, 831002-061, 111040
CP-R1444	1/4	115	6	Ball	816141-001
CP-R1356	1/3	115	5	Ball	817025-013, 831003-061, 111042
CP-R1446	1/3	115	6	Ball	816141-002
CP-R1359	1/2	115/230	7	Ball	831009-061, 111044
CP-R1368	1/2	230/460	8	Ball	811757-003, 020, 023, 831011-083, 111046
CP-R1369	1/2	575	8	Ball	811757-004, 111046-5
CP-R1459	3/4	115/230	9	Ball	811757-001, 111044
CP-R1362	3/4	115/230	7	Ball	831010-062, 111047
CP-R1370	3/4	230/460	8	Ball	831012-083, 111049
CP-R1372	3/4	575	8	Ball	811757-006, 111049-5
CP-R1462	3/4	115/230	9	Ball	811757-002, 033, 111047
CP-R1470	3/4	230/460	10	Ball	811575-005, 111049
CP-R1472	3/4	575	10	Ball	811757-005, 024, 027, 111049-5
CP-R1363	1	115/230	7	Ball	816676-062, 111050
CP-R1371	1	230/460	8	Ball	816675-069, 169090
CP-R1373	1	575	8	Ball	816676-068, 169090-5
CP-R1463	1	115/230	9	Ball	811757-007, 028, 031, 111050
CP-R1471	1	230/460	10	Ball	811757-008, 169090
CP-R1473	1	575	10	Ball	811757-009, 028, 031, 169090-5
CP-R1365	1 1/2	115/230	7	Ball	816678-062, 169095
CP-R1374	1 1/2	230/460	8	Ball	816678-069, 169092
CP-R1375	1 1/2	575	8	Ball	816685-068, 196092-5



CP-R1359
Illustrated



CP-R1373
Illustrated



CP-R1463
Illustrated



CP-R1471
Illustrated

Pump Couplers

Easy Links - Spirolink



T6-10010
Illustrated



T6-10034
Illustrated

Part#	Specification	Description
T6-10010	1/2" x 1/2"	1/2 to 1/3 HP Easy Link
T6-10010SL	1/2" x 1/2"	Spirolink
T6-10023	1/2" x 1/2" or 1/2" x 5/8"	1/2 to 3/4 HP Easy Link
T6-10023SL	1/2" x 1/2" or 1/2" x 5/8"	Spirolink
T6-10034SL	1/2" x 5/8" or 5/8" x 5/8"	Spirolink
T6-10045SL	1/2" x 5/8" or 5/8" x 5/8"	Taco

Index

PART #	PAGE	PART #	PAGE	PART #	PAGE	PART #	PAGE	PART #	PAGE	PART #	PAGE	PART #	PAGE
36-2S440	8	CF-3734	25	EC-HE0176	7,50	CP-R1374	66	O4-R5212	10	M2-R31065	54	M5-S1451	34
36-3S440	8	CF-3735	25	EC-HE0182	7,50	CP-R1375	66	O4-R5221	10	M2-R31672	54	M5-S1453	33,43
36-4S440	8	BF-4701	32	R1-R101	9,48,61	CP-R1444	66	O4-R5222	10	M2-R31710	26	M5-S1454	34,54,62
36-5-370440	8	BF-4706	32	R1-R101L	9,51	CP-R1446	66	O4-R5311	10,45,60	M2-R31712	26	M5-S1455	33,43
36-5R3744	8	BF-4708	32	R1-R103	9,48,51	CP-R1459	66	O4-R5312	10	M2-R31716	26	M5-S1456	34,63
36-5S440	8	EE-5011	13	R1-R103L	9,51	CP-R1462	66	O4-R5401	10,63	M2-R31718	26	M5-S1502	33,40,46
36-7.SS440	8	EE-5012	13	R1-R108	9,52	CP-R1463	66	O4-R5411	10,45,50,60,63	M2-R31862	60	M5-S1503	33
36-7-370440	8	EE-5112	13	R1-R114	9	CP-R1470	66	O4-R5412	10	M2-R31864	60	M5-S1504	33,40
36-7R3744	8	EE-5211	13	R1-R120	9,48	CP-R1471	66	O4-R5421	10,45,60	M2-R32050	43,45,57,65	M5-S1506A	33,43
36-8S440	8	EE-5311	13	R1-R122	9,44,48	CP-R1472	66	O4-R5422	10	M2-R32051	43,45,57,65	M5-S1507A	33,43
36-10-370440	8	EE-5411	13	R1-R123	9,52	CP-R1473	66	O4-R5443	6	M2-R32058	65	M5-S1508	33
36-10R3744	8	EE-5421	13	R1-R124	9,47	O4-R2011	11,50	O4-R5444	6	M2-R32117	57	M5-S1510	33,47
36-10S440	8	EE-5610	13,51	R1-R125	9,47	M4-R2189	4,31	O4-R5460	12,45	M2-R32184	65	M5-S1512	33
36-12.SS440	8	EE-5611	13,51	R1-R127	9,48	M4-R2194	31,61	O4-R5470	3	R6-R32317	38	M5-S1514	33
36-12-370440	8	EE-5811	13	R1-R128	9,44	M4-R2195	31,61	O4-R5472	3	M2-R32511	65	M5-S1516	33
36-12R3744	8	EE-5821	13	R1-R129	9,50	M4-R2197	31,61	O4-R5611	10,51	M2-R32512	65	M5-S1518	33
36-15-370440	8	EE-8416	14	R3-R130	39	M4-R2198	31,61	O4-R5612	10,51	M2-R32671	65	M5-S1532	33,40
36-15R3744	8	UE-9403	56	R1-R137	9,44	M4-R2269	53	O4-R5711	14,50,51,55	M2-R32716	65	M5-S1534	33
36-15S440	8	UE-9608	61	M2-R139	59	M4-R2324	36,57	O4-R5715	14,55,63	M2-R32957	65	M5-T1536	33,46
36-17-370440	8	T6-10010	66	R3-R205	17	M4-R2362	19	O4-R5716	14	R4-R34201	52	M5-T1538	33
36-17R3744	8	T6-10023	66	O6-R230	17,44	M4-R2368	56	O4-R5720	14,50,51,55,63	R6-R42310	56	M5-T1539	33
36-20-370440	8	EC-1055223	15	O6-R260	16	M4-R2372	60	O4-R5811	11,63	M2-R42440	42	M5-T1540	33,47
36-20R3744	8	EC-1055224	15	O6-R262	16	M4-R2381	19	O4-R5812	11	R6-R42464	54	M5-T1542	33
36-20S440	8	EC-1055303	15	O6-R264	16	M4-R2387	41	O4-R5821	11	R6-R42575	43	M5-T2110	35
36-25-370440	8	EC-1055318	15	O6-R265	16	M4-R2423	54	O4-R5822	11	R6-R42604	26,62	M5-T2113	35
36-25-5-3744	8	EC-4012309	15	O6-R266	16	O4-R2511	11	O4-R5911	10,45,50	R6-R42605	26,62	M5-T2118	35
36-25SR3744	8	EC-4012543	15	O6-R267	16	O4-R2512	11	O4-R6247	10,46	R6-R42606	26,62	M5-T2121	35
36-25R3744	8	T6-10010SL	66	R3-R291	17,53	O4-R2521	11	O4-R6273	10	R6-R42607	26,62	M5-T2130	35
36-30-370440	8	T6-10023SL	66	R3-R302	38	O4-R2522	11	O4-R6350	6	R6-R42811	47	M5-T2135	35
36-30-5-3744	8	T6-10034SL	66	R3-R313	17,39,55	M4-R2580	48	O4-R6355	6	R6-R43241	65	M5-T2137	35
36-30SR3744	8	T6-10045SL	66	R3-R314	18,39,55	M4-R2601	60	O4-R6360	6	R6-R43463	27	M5-T2140	35
36-30R3744	8	UE-170B	41	R3-R316	36,37	M3-R2603	16	O4-R6365	6	R6-R43464	27	M5-T2142	35
36-35-370440	8	UE-174A	46	R3-R318	17,39	M3-R2604	16	O4-R6370	6	R6-R43466	27	M5-T2143	35
36-35-5-3744	8	EC-18W115	15	R3-R326	17,38,39	M4-R2605	16	O4-R6375	6	R6-R43467	27	M5-T2155	35
36-35SR3744	8	EC-18W230	15	R3-R348	36,64	M3-R2609	53	O4-R6380	6	R6-R43520	56	M5-T2156	35
36-35R3744	8	EC-34W115	15	R3-R358	17,38,39	M3-R2612	53	O4-R6385	6	R6-R43600	28	M5-T2157	35
36-40-370440	8	EC-34W115-V1543	15,59	R3-R359	18,38,39	M4-R2622	37	O4-R6711	5,51	R6-R43601	28	M5-T2158	35,47
36-40-5-3744	8	EC-34W230	15	R3-R360	17,53	M4-R2630	47	O4-R6712	5	R6-R43602	28	M5-T2164	35
36-40SR3744	8	EC-34W230-V1542	15,59	R3-R366	36,64	M4-R2634	19	O4-R6811	5	R6-R43603	28	M5-T2165	35
36-40R3744	8	UE-435A	59	R3-R368	17,59	M4-R2635	19	O4-R8124	5	R6-R44587	57	M5-T2166	35,47
36-45-370440	8	EC-4VEA006	15	R3-R369	18,59	M4-R2639	44	O4-R8125	5	R6-R44589	57	M5-T2167	35
36-45-5-3744	8	EC-4VEA007	15	R3-R370	17,53	M4-R2655	36,57	O4-R9211	51	R6-R49983	52	M5-T2529	34
36-45SR3744	8	EC-4VEA009	15	R3-R371	18,53	M3-R2657	54	M2-R22000	42	M1-R52101	19	M5-T2531	55
36-45R3744	8	EC-4VEA010	15	R3-R373	64	M3-R2658	54	M2-R22011	42	M1-R52102	19	M5-T2532	34,39
36-50-370440	8	EC-4VEA012	15	R3-R375	20	M3-R2671	44	M2-R22012	42	M1-R52107	19	M5-T2533	34,39
36-50R3744	8	EC-4VEA013	15	R3-R376	20	M4-R2675	37,59	M2-R22140	65	M1-R52113	19	M5-T2534	34
DD-030	31	EC-4W115	15	R2-R422	36,64	M4-R2677	37	M2-R22152	41	M1-R52114	19	M5-T2535	34,55
DD-034	30	EC-4W115V835	15,38	R2-R438	36	M4-R2679	64	M2-R22170	58	M1-R52118	19	M5-T2536	34,39
DD-035	30,56	EC-4W230	15	R2-R462	36,64	M4-R2691	38	M2-R22275	64	M1-R52126	19	M5-T2537	34,39,40
DD-036	30	UE-513A	41	O1-R465	36,57	M4-R2693	19	M2-R22401	23,59	M1-R52170	44	M5-T2538	34,52,54,63
DD-044	30	EC-5W115	15	O6-R499	64	M4-R2722	22	M2-R22402	23,59	M1-R52489	19	M5-T2539	34,39,40
DD-045	30	EC-5W230	15	O6-R511	39	M4-R2723	22	M2-R22403	23	M1-R52639	49	M5-T2540	34,52,54,63
DD-046	30	UE-680A	61	T1-R605	39,63	M4-R2724	22	M2-R22404	23	M1-R52761	19	M5-T2541	44
UE-89	19	EC-6W115	15	T1-R606	49	M3-R2811	53	M2-R22405	23	M1-R52775	65	M5-T2542	34,63
UE-373	61	EC-6W230	15	T1-R607	49	M3-R2817	53	M2-R22408	23	M1-R52820	57	M5-T2543	34,63
UE-580	41	UE-794A	59	T1-R611	52	M4-R2928	44	M2-R22410	23	M1-R53676	19	M5-T2544	34,39
UE-598	62	UE-795A	58	T1-R621	46	M4-R2929	44	M2-R22412	23	M1-R53686	19	M5-T2545	34
UE-641	61	UE-9406A	56	T1-R630	16	M4-R2930	21	M2-R22415	23	M1-R53696	19		
UE-642	62	EC-9W115	15	M4-R740	48	M4-R2932	21	M2-R22418	23	M1-R62350	49		
UE-799	31,61	EC-9W115V834	15,38	M4-R741	64	M4-R2940	21	M2-R22420	23	US-R90572	17,40,50		
CF-812	25	EC-9W230	15	M4-R742	47	M4-R2942	21	M2-R22422	23	US-R90573	18,40,50		
CF-813	25	92-A4856	33	T1-R1014	83	R4-R3001	50	M2-R22425	23	US-R90574	17,50,55		
CF-814	25	66-A508202	16	M4-R1050	62	R4-R3042	63	M2-R22428	23	US-R90575	18,50,55		
CF-816	25	66-A508216	16	R3-R1052	17,38,53	R4-R3047	46	M2-R22430	23	US-R90671	18,49		
UE-945	62	66-A610215	16	R3-R1053	18,38,53	R4-R3067	50	M2-R22435	23	US-R90672	18,49		
UE-952	61	66-A610220	16	O4-R1211	9	R4-R3124	46	M2-R22437	58	US-R90721	18,20,40,50,55		
UE-953	61	66-A610225	16	CP-R1310	66	O4-R3511	11,45,51,60	M2-R22438	23	US-R91189	18,55		
UE-954	61	93-A7105	16	CP-R1311	66	O4-R3512	11,45,60	M2-R22445	39	R7-RB11	57		
UE-955	62	92-A8550	29	CP-R1320	66	O4-R3521	11	M2-R22576	54	R7-RB20	16		
EE-2511	13	92-A8555	29	CP-R1350	66	O4-R3522	11	M2-R22600	24	R7-RB22	16		
EE-2512	13	92-A8556	29	CP-R1351	66	O4-R3531	11,45	M2-R22601	24	R7-RB24	16		
EE-3511	13	92-A8557	29	CP-R1352	66	O4-R3532	11,45	M2-R22602	24	R7-RB25	16		
EE-3512	13	92-A8600	16	CP-R1354	66	O4-R3612	11,60	M2-R22603	24	R7-RB26	16		
DD-3583	29	92-A8602	16	CP-R1356	66	O4-R5011	12,45	M2-R22604	24	R7-RB28	16		
DD-3584	29	92-A8604	16	CP-R1359	66	O4-R5012	12,45	M2-R22605	24	R7-RB30	16		
DD-3585	29	92-A8606	16	CP-R1362	66	O4-R5021	12	M2-R22719	58	R7-RB109	57		
DD-3586	29	92-A8617	29	CP-R1363	66	O4-R5022	12,45,60	M2-R22745	39	R7-RB141	47		
DD-3587	29	92-AW12	26	CP-R1365	66	O4-R5031	12,45	M2-R22746	39	R7-RB245	37		
DD-3588	29	92-AW58	26	CP-R1368	66	O4-R5032	12,45	M2-R23465	27	R7-RB323	44		
DD-3589	29	EC-EUBKT01	15	CP-R1369	66	O4-R5090	10	M2-R23468	27	FB-RFB902	57		
DD-3590	29	EC-FC-1893	31	CP-R1370	66	O4-R5109	10	M2-R23469	27	O3-RF2466	51		
CF-3726	25	EC-FC-1895	31	CP-R1371	66	O4-R5112	12,60	M2-R30409	54	66-RFC300	31		
CF-3732	25	EC-HE0147	7,38	CP-R1372	66	O4-R5122	12,60	R4-R30575	52	66-RFC400	31		
CF-3733	25	EC-HE0170	7,38	CP-R1373	66	O4-R5211	10,60	M2-R30900	54	66-RFC600	31		



WWW.ROTOM.COM

LEGAL NOTICE - Rotom is a registered trademark of Alltemp Products Company Limited (Alltemp). It is important to note that Alltemp is not affiliated with any of the original equipment manufacturers or their brands which may be referred to herein. All brand names or trademarks used herein are the property of their respective owners and all original equipment manufacturers' names, numbers, symbols and descriptions are for cross reference purposes only. It is not implied that any part referred to herein is the product of any original equipment manufacturer, nor any of its associated brands.

TRADEMARK DISCLAIMER - Product names, logos, brands and other trademarks featured within are the property of their respective trademark holders. These trademark holders are not affiliated with Alltemp, our products or our website. No association between Alltemp and any trademark holder is expressed or implied. Names, numbers, symbols and descriptions are for cross reference purposes only.

ROTOM® is a registered trademark of ALLTEMP® PRODUCTS COMPANY LIMITED. ALLTEMP® has made an effort to illustrate with photos, outline drawings and/or descriptions, the products in this catalogue. These are for the sole purpose of identification. We do not express or imply that products conform exactly to the descriptions, drawings and/or photos. All reasonable effort has been made to accurately determine a suitable product. However, all users are solely responsible to evaluate and determine for themselves the suitability for the product purchased for the use intended. All information, data and dimension tables in this catalogue have been carefully compiled and thoroughly checked. However, no responsibility for possible errors or omissions can be assumed. The company reserves the right to change specifications and other information included in this catalogue without notice. The vendor's responsibility shall be limited only to its written warranty and the vendor shall not be responsible for any loss, cost or damage whatsoever from the use of this product by you or your customers.