


Model #SJS150-1


1 ½ HP Stainless Steel Tankless Booster Pump

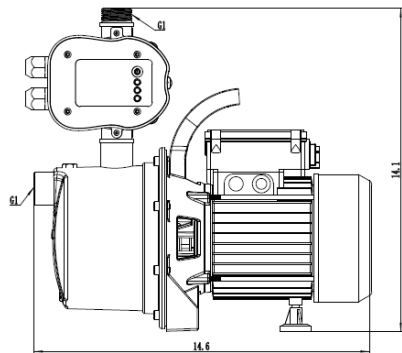

Features & Benefits:

- ❖ For use on shallow well applications up to 160ft water level.
- ❖ Mounted with a pressure regulator.
- ❖ Electronic system eliminates the conventional tanks & pressure switch.
- ❖ Regulates and controls rate and flow of water.
- ❖ Protects pumps from running dry when low water level in well.
- ❖ 6ft power cord.
- ❖ 2 year warranty.

Inlet	NPT1
Discharge	NPT1
Pump Cover	ZL102
Pump Body	304
Switch Type	Water-proof switch_KCD4(UL)
Impeller	PPO-GF30
Seal Design	Mechanical seal
Seal Material	Graphite & Ceramic
Oil Filled Motor	No
Power Cord	16AWG*6.4ft (16AWG*1.6ft)
Net Weight	22.7
Gross Weight	25.4
Package Size	22.6*10.2*11.6
Expected Life Cycle	4000 Hours
Motor Wires	Aluminum
Self-Priming	No
Certification	ETL

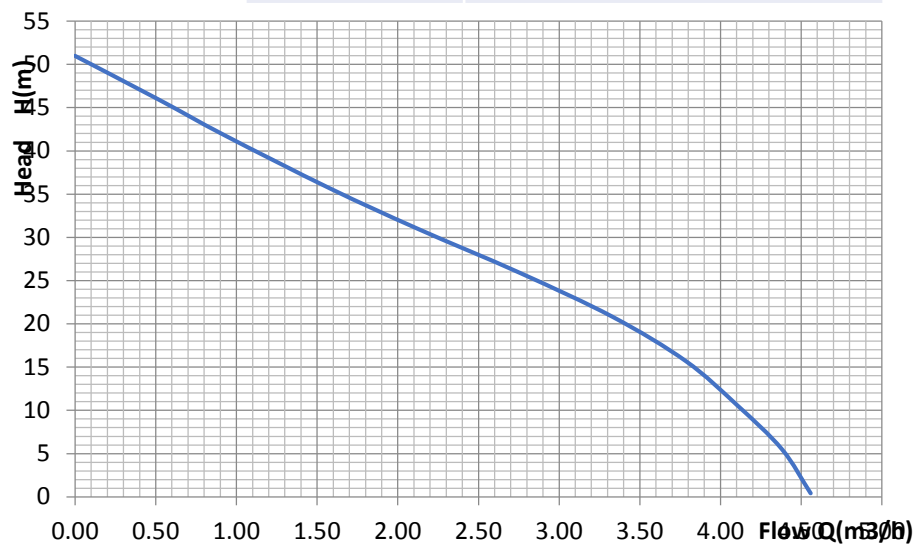

Model	HP	Voltage	AMP	Discharge NPT(In)	GPH of water @ Total Ft. of Head					Max.Head Ft
					5 ft	10 ft	15 ft	20 ft	25 ft	
SJS150-1	1-1/2	115	10	1	1200	1000	580	160		165